

1.0 Reference and Address			
Report Number	180824101GZU-001	Original Issued: 8-Nov-2018	Revised: 16-Jul-2019
Standard(s)	Standard For Furniture Power Distribution Units [UL 962A:2016 Ed.4+R:10Oct2017] CSA C22.2#308 Issued: 2014/12/01 Cord Reels and Multi-Outlet Assemblies		
Applicant	<u>Dongguan baiyou electronic co.,ltd</u>	Manufacturer	<u>Dongguan baiyou electronic co.,ltd</u>
Address	2 F A building wufeng industrial jintan road shijie town dongguan city guangdong 523295	Address	2 F A building wufeng industrial jintan road shijie town Dongguan city Guangdong 523295
Country	CHINA	Country	CHINA
Contact	Yang yongxin Cherry chen	Contact	Yang yongxin Cherry chen
Phone	86 13556785659 86 18002616618	Phone	86 13556785659 86 18002616618
FAX	NA	FAX	NA
Email	baiyouyyx@163.com dgbaiyou@163.com	Email	baiyouyyx@163.com dgbaiyou@163.com

2.0 Product Description	
Product	Furniture Power Distribution Units
Brand name	BAYU
Description	The products covered by this report are household furniture power distribution units for indoor used only. The product used for mounting above face onto a cabinet or similar furnitures.
Models	BY213- followed by H, M, Q, N, L, C, J , S or I; followed by 01, 02, 03, 04 or 05; maybe followed by 1, 2 or 3; maybe followd by K.
Model Similarity	All the model used the same material and had the same rating. For example, use BY213-XABC to represent the model no.: X=H, M, Q, N, L, C ,J, S or I, indicates the differences series of product. Every series had the different facade shape. A=01, 02, 03, 04 or 05, indicates the numbers of socket outlets which have the different length. The socket outlets may be use with or without TR Receptacles. B= 1, 2 , 3 or nil, indicates the USB port.nil represent without USB port. 1, 2, 3 indicate the different type of USB output port. C=K or nil, indicates with or without OCP. K represent with OCP. nil represent without OCP. (All models shown in Illu. 3.1 to 3.9 of Sec 7.0)
Ratings	12A, 125V, 60Hz, 1500W MAX
Other Ratings	USB port output: 5VDC Max. 2.1A

3.0 Product Photographs

Photo 1 - Front view of model BY213-S043K.



Photo 2 - Back view of model BY213-S043K.



3.0 Product Photographs

Photo 3 - Internal view of model BY213-S043K.

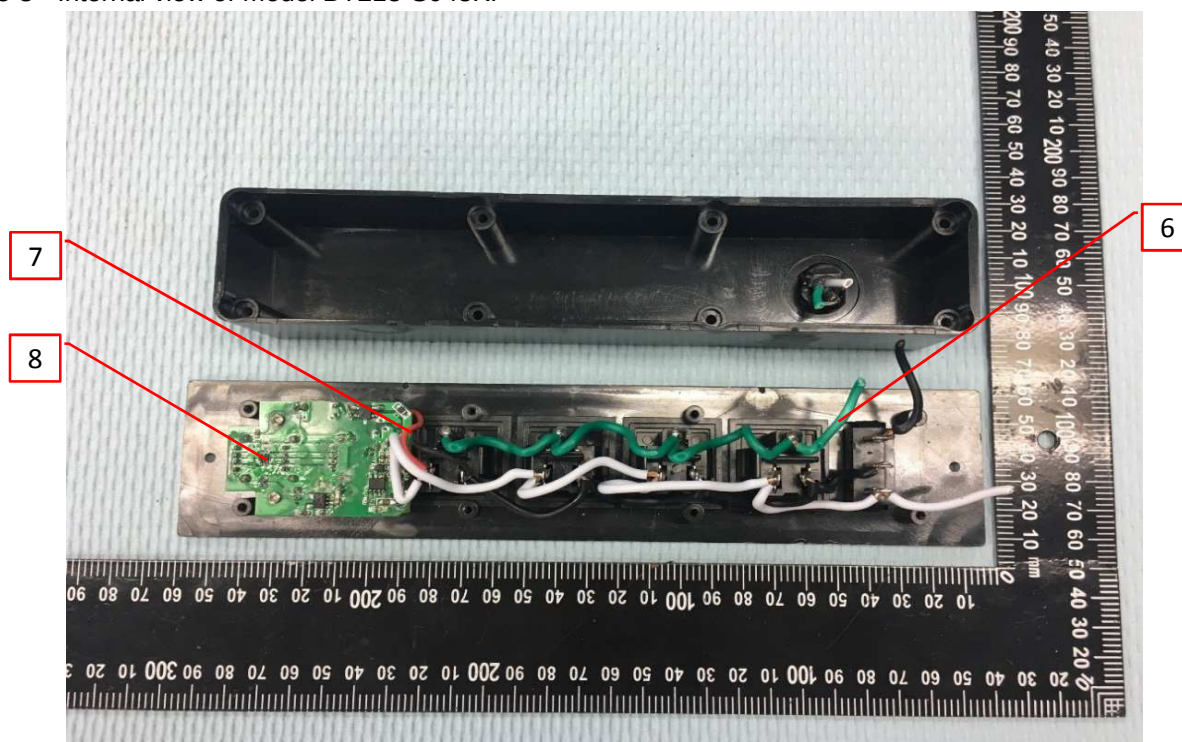


Photo 4 - Front view of model BY213-L021



3.0 Product Photographs

Photo 5 -Back view of model BY213-L021



Photo 6 - Front view of model BY213-C021



3.0 Product Photographs

Photo 7 - Back view of model BY213-C021



Photo 8 - Front view of model BY213-M042K.



3.0 Product Photographs

Photo 9 - Back view of model BY213-M042K.



Photo 10 - Front view of model BY213-H021



3.0 Product Photographs

Photo 11 - Back view of model BY213-H021



Photo 12 - Front view of model BY213-I012



3.0 Product Photographs

Photo 13 - Front view of model BY213-I012(TR TYPE)



Photo 14 - Back view of model BY213-I012



3.0 Product Photographs

Photo 15 - Front view of Model BY213-N011



Photo 16 - Back view of Model BY213-N011



3.0 Product Photographs

Photo 17 - Front view of Model BY213-N011



Photo 18 - Back view of Model BY213-N011



3.0 Product Photographs

Photo 19 - Front view of Model BY213-J022



Photo 20 - Back view of Model BY213-J022



3.0 Product Photographs

Photo 21 - Front view of Model BY213-H021



Photo 22- Back view of Model BY213-H021



3.0 Product Photographs

Photo 23- Front view of Model BY213-Q041K



Photo 24- Back view of Model BY213-Q041K



3.0 Product Photographs

Photo 25- Front view of Model BY213-M032



Photo 26- Back view of Model BY213-M032



3.0 Product Photographs

Photo 27- Side view of Model BY213-M032



Photo 28 - Side view of Model BY213-M032



4.0 Critical Components						
Photo #	Item no. ¹	Name	Manufacturer/ trademark ²	Type / model ²	Technical data and securement means	Mark(s) of conformity ³
1	1	Power supply cord	Various	Various	Nondetachable power-supply cord, 5-15P Plug with SJT or SPT-3 16AWG/3 or 14AWG/3, finished length: 1.5ft~25ft (1.5ft~15ft for SPT-3). Refer to Sec 7.0 illustration 1 for specific use.	cULus, cETLus
1	2	Enclosure	DOGNGGUAN LOYALER SCI&TECH CO LTD	PC 1100	Black, Min.Thickness 2.0 mm. Rated V-0, RTI 80°C.	cURus
3	3a	Receptacle	SUN-LITE SOCKETS INDUSTRY INC	I-103A	5-15R, 15A 125V	cURus
			RONG EFNG INDUSTRIAL CO LTD	RF-6001	5-15R, 15A 125V	cURus
				RF-6002	5-15R, 13A 125V(for wire size 16 AWG)	cURus
			SHENZHEN B-STAR Technology CO LTD	BS-U15-XX	5-15R, 15A 125V	cURus
14	3b	TR receptacle		BS-U15-XXB	5-15R, 15A 125V	cURus
1	4	Overcurrent protector	SUN-LITE SOCKETS INDUSTRY INC	BS-028-1	12A, 125V, OC Type, TC 2, OL 1, SC 1KA, U1, trip free, manual reset type.	cURus
			KUOYUH W L ENTERPRISE CO LTD	88 Series	12A, 125V, OC Type, TC 2, OL 1, SC 1KA, U1, trip free, manual reset type.	cURus
2	5	Insulating Bushings	HEAVY POWER CO LTD	7N-2	PA66, Fire rating: V-2, Dimension:21x19mm	UR
3	6	Internal wires	Various	AWM	16 AWG, 300V, 105°C. Connecting to contacts terminals by hooking and soldering.	cURus, cETLus recognized
3	7	USB input wire	Various	Various	Min.24 AWG, 300V, 105°C	cURus, cETLus recognized
3	8	USB Module	Dongguan baiyou electronic co., ltd	A021-2-USB	5VDC, 2.1A (for BY213-H, BY213-M series)	cETLus recognized
				Q021-2-USB	5VDC, 2.1A (for BY213-Q series)	
				Q021-1-USB	5VDC, 2.1A (for BY213-N series)	
				Q021-USB	5VDC, 2.1A (for BY213-L series)	
				C021-USB	5VDC, 2.1A (for BY213-C series)	
				S022-USB	5VDC, 2.1A (for BY213-J, BY213-I series)	
				S023-USB	5VDC, 2.1A (for BY213-S series)	
3	9	label(Not shown)	Various	Various	Comply with UL 969, -40~80°C, suitable for PC surface.	cURus

NOTES:

1) Not all item numbers are indicated (called out) in the photos, as their location is obvious.

2) "Various" means any type, from any manufacturer that complies with the "Technical data and securement means" and meets the "Mark(s) of conformity" can be used.

3) Indicates specific marks to be verified, which assures the agreed level of surveillance for the component. "NR" - indicates Unlisted and only visual examination is necessary. "See 5.0" indicates Unlisted components or assemblies to be evaluated periodically refer to section 5.0 for details.

5.0 Critical Unlisted CEC Components

No Unlisted CEC components are used in this report.

6.0 Critical Features

Recognized Component - A component part, which has been previously evaluated by an accredited certification body with restrictions and must be evaluated as part of the basic product considering the restrictions as specified by the Conditions of Acceptability.

Listed Component - A component part, which has been previously Listed or Certified by an accredited Certification Organization with no restrictions and is used in the intended application within its ratings.

Unlisted Component - A part that has not been previously evaluated to the appropriate designated component standard. It may also be a Listed or Recognized component that is being used outside of its evaluated Listing or component recognition.

Critical Features/Components - An essential part, material, subassembly, system, software, or accessory of a product that has a direct bearing on the product's conformance to applicable requirements of the product standard.

Construction Details - For specific construction details, reference should be made to the photographs and descriptions. All dimensions are approximate unless specified as exact or within a tolerance. In addition to the specific construction details described in this Report, the following general requirements also apply.

1. Spacing - In primary circuits, 1.6 mm minimum spacing are maintained through air and over surfaces of insulating material between current-carrying parts of opposite polarity and 1.6 mm minimum between such current-carrying parts and dead-metal parts other than the enclosure. And 6.4 mm minimum spacing through air and minimum 12.7 mm over surface are maintained between live parts and a conductive enclosure.
2. Mechanical Assembly - Components such as switches, fuseholders, connectors, wiring terminals and display lamps are mounted and prevented from shifting or rotating by the use of lockwashers, starwashers, or other mounting format that prevents turning of the component.
3. Corrosion Protection - All ferrous metal parts are protected against corrosion by painting, plating or the equivalent.
4. Accessibility of Live Parts - All uninsulated live parts in primary circuitry are housed within a non-metallic enclosure constructed with no openings other than those specifically described in Sections 4.
5. Grounding - All exposed dead-metal parts and all dead-metal parts within the enclosure that are exposed are connected to the grounding lead of the power supply cord.
6. Polarized Connection - This product is provided with a polarized power supply connection. All single pole switches and fuses are connected only to the ungrounded supply circuit conductor.
7. Internal Wiring - Internal wiring is routed away from sharp or moving parts. Internal wiring leads terminating in soldered connections are made mechanically secure prior to soldering. Recognized Component separable (quick disconnect) connectors of the positive detent type, closed loop connectors, or other types specifically described in the text of this report are also acceptable as internal wiring terminals. At points where internal wiring passes through metal walls or partitions, the wiring insulation is protected against abrasion or damage by plastic bushings or grommets.
8. Schematics - NA
9. Markings - The product is marked on a labeling system as described in item no. 9 of Section 4.0 or by a permanent method such as printing, painting, stamping or etching metal as follows:
Refer to Illustration 2.1 thru 2.3 of Sec. 7.0 for details.
10. Cautionary Markings - The following are required:
Refer to Illustration 2.1 thru 2.3 of Sec. 7.0 for details.
11. Installation, Operating and Safety Instructions - Instructions for installation and use of this product are provided by the manufacturer.
12. Logo Dependent Marking - The required marking is dependent on the specific ETL logo applied to the product as authorized by the Authorization to Mark. In addition to the required marking of items 9 and 10 above, all products bearing the cETLus, ETLus or cETL logo must also be marked in letters no less than 2.4 mm high with:
Refer to Illustration 2.1 thru 2.3 of Sec. 7.0 for detail.
13. Production Control - NA

7.0 Illustrations

Illustration 1 - Table of version differences per model number.

Section	Item	Specific Difference	Logo Restriction
4	1	AWG 14	none
4	1	AWG 16	ETLus only

Illustration 2 - Marking.

The following marking is shown on the smallest package unit or enclosure of the FPDU.(representative)

Illustration 2.1 - Marking for cETLus.



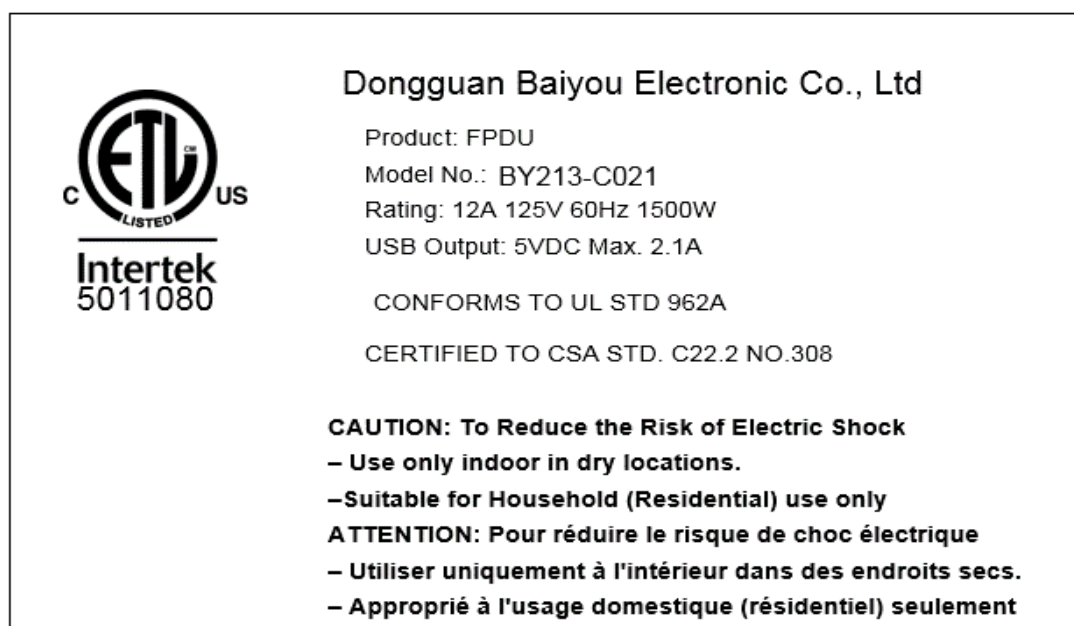


Illustration 2.2 - Marking for ETLus.

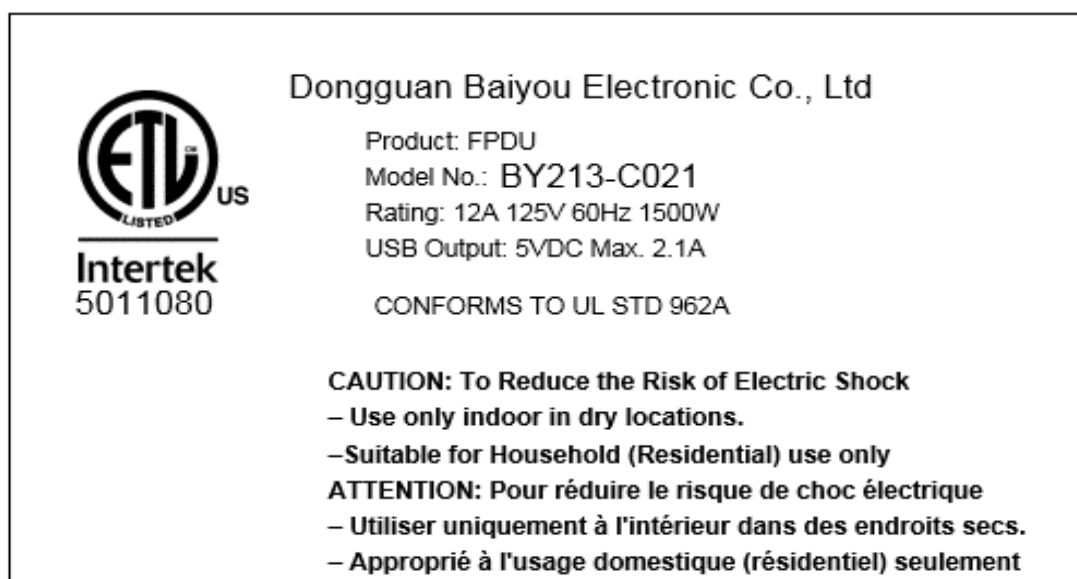

7.0 Illustrations

Illustration 2.3 - Marking for cETL.

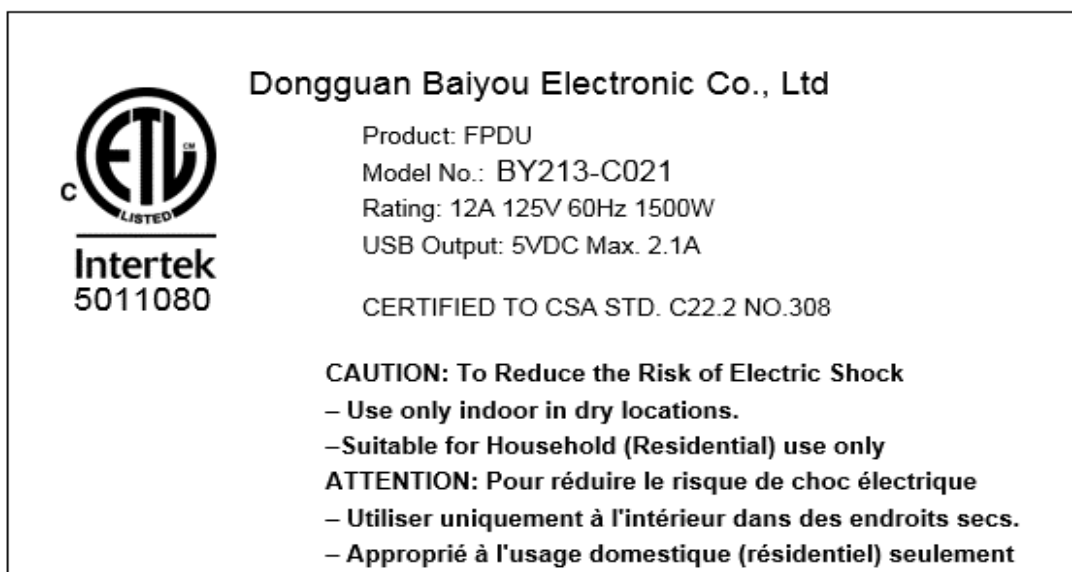

Remark:

- The ETL logo shall not be less than 8 mm in diameter, and the "US" and "C" shall not be less than 2 mm in height.
- The "Intertek" shall not be less than 3 mm in height,
- The Control Number "5011080" shall not be less than 2 mm in height.
- The "CONFORMS TO UL STD. 962A", "CERTIFIED TO CSA STD. C22.2 NO. 308" shall not be less than 1.5 mm in height.
- The date or other dating period of manufacture not exceeding any three consecutive months shall show on the label or the product enclosure.
- The brandname, model no. and electrical rating shall be according to Sec. 2.0 and Sec. 9.0.
- The ETL logo marked with cETLus, cETL or ETLus should be according to Illustration 1.

7.0 Illustrations

Illustration 3.1 - Model Similarity of BY213-H series

Series	model	Description
H series	BY213-H011	1 socket+1 USB
	BY213-H021	2 sockets+1 USB
	BY213-H031	3 sockets+1 USB
	BY213-H011K	1 socket+1 USB+ OCP
	BY213-H021K	2 sockets+1 USB+ OCP
	BY213-H031K	3 sockets+1 USB+ OCP
	BY213-H041K	4 sockets+1 USB+ OCP
	BY213-H02	2 sockets
	BY213-H03	3 sockets
	BY213-H01K	1 socket + OCP
	BY213-H02K	2 sockets + OCP
	BY213-H03K	3 sockets + OCP
	BY213-H04K	4 sockets + OCP
	BY213-H05K	5 sockets + OCP

Illustration 3.2 - Model Similarity of BY213-M series

Series	model	Description
M series	BY213-M012	1 socket+1 USB
	BY213-M022	2 sockets+1 USB
	BY213-M032	3 sockets+1 USB
	BY213-M012K	1 socket+1 USB+ OCP
	BY213-M022K	2 sockets+1 USB+ OCP
	BY213-M032K	3 sockets+1 USB+ OCP
	BY213-M042K	4 sockets+1 USB+ OCP
	BY213-M02	2 sockets
	BY213-M03	3 sockets
	BY213-M01K	1 socket + OCP
	BY213-M02K	2 sockets + OCP
	BY213-M03K	3 sockets + OCP
	BY213-M04K	4 sockets + OCP
	BY213-M05K	5 sockets + OCP

Illustration 3.3 - Model Similarity of BY213-Q series

Series	model	Description
Q series	BY213-Q011	1 socket+1 USB
	BY213-Q021	2 sockets+1 USB
	BY213-Q031	3 sockets+1 USB
	BY213-Q011K	1 socket+1 USB+ OCP
	BY213-Q021K	2 sockets+1 USB+ OCP
	BY213-Q031K	3 sockets+1 USB+ OCP
	BY213-Q041K	4 sockets+1 USB+ OCP
	BY213-Q02	2 sockets
	BY213-Q03	3 sockets
	BY213-Q01K	1 socket + OCP
	BY213-Q02K	2 sockets + OCP
	BY213-Q03K	3 sockets + OCP
	BY213-Q04K	4 sockets + OCP
	BY213-Q05K	5 sockets + OCP

7.0 Illustrations

Illustration 3.4 - Model Similarity of BY213-L series

Series	model	Description
L series	BY213-L011	1 socket+1 USB
	BY213-L021	2 sockets+1 USB
	BY213-L031	3 sockets+1 USB
	BY213-L011K	1 socket+1 USB+ OCP
	BY213-L021K	2 sockets+1 USB+ OCP
	BY213-L031K	3 sockets+1 USB+ OCP
	BY213-L041K	4 sockets+1 USB+ OCP
	BY213-L02	2 sockets
	BY213-L03	3 sockets
	BY213-L01K	1 socket + OCP
	BY213-L02K	2 sockets + OCP
	BY213-L03K	3 sockets + OCP
	BY213-L04K	4 sockets + OCP
	BY213-L05K	5 sockets + OCP

Illustration 3.5 - Model Similarity of BY213-C series

Series	model	Description
C series	BY213-C011	1 socket+1 USB
	BY213-C021	2 sockets+1 USB
	BY213-C031	3 sockets+1 USB
	BY213-C011K	1 socket+1 USB+ OCP
	BY213-C021K	2 sockets+1 USB+ OCP
	BY213-C031K	3 sockets+1 USB+ OCP
	BY213-C041K	4 sockets+1 USB+ OCP
	BY213-C02	2 sockets
	BY213-C03	3 sockets
	BY213-C01K	1 socket + OCP
	BY213-C02K	2 sockets + OCP
	BY213-C03K	3 sockets + OCP
	BY213-C04K	4 sockets + OCP
	BY213-C05K	5 sockets + OCP

Illustration 3.6 - Model Similarity of BY213-J series

Series	model	Description
J series	BY213-J012	1 socket+1 USB
	BY213-J022	2 sockets+1 USB
	BY213-J032	3 sockets+1 USB
	BY213-J012K	1 socket+1 USB+ OCP
	BY213-J022K	2 sockets+1 USB+ OCP
	BY213-J032K	3 sockets+1 USB+ OCP
	BY213-J042K	4 sockets+1 USB+ OCP
	BY213-J02	2 sockets
	BY213-J03	3 sockets
	BY213-J01K	1 socket + OCP
	BY213-J02K	2 sockets + OCP
	BY213-J03K	3 sockets + OCP
	BY213-J04K	4 sockets + OCP
	BY213-J05K	5 sockets + OCP

7.0 Illustrations

Illustration 3.7 - Model Similarity of BY213-I series

Series	model	Description
I series	BY213-I012	1 socket+1 USB
	BY213-I022	2 sockets+1 USB
	BY213-I032	3 sockets+1 USB
	BY213-I012K	1 socket+1 USB+ OCP
	BY213-I022K	2 sockets+1 USB+ OCP
	BY213-I032K	3 sockets+1 USB+ OCP
	BY213-I042K	4 sockets+1 USB+ OCP
	BY213-I02	2 sockets
	BY213-I03	3 sockets
	BY213-I01K	1 socket + OCP
	BY213-I02K	2 sockets + OCP
	BY213-I03K	3 sockets + OCP
	BY213-I04K	4 sockets + OCP
	BY213-I05K	5 sockets + OCP

Illustration 3.8 - Model Similarity of BY213-N series

Series	model	Description
N series	BY213-N011	1 socket+1 USB
	BY213-N021	2 sockets+1 USB
	BY213-N031	3 sockets+1 USB
	BY213-N011K	1 socket+1 USB+ OCP
	BY213-N021K	2 sockets+1 USB+ OCP
	BY213-N031K	3 sockets+1 USB+ OCP
	BY213-N041K	4 sockets+1 USB+ OCP
	BY213-N02	2 sockets
	BY213-N03	3 sockets
	BY213-N01K	1 socket + OCP
	BY213-N02K	2 sockets + OCP
	BY213-N03K	3 sockets + OCP
	BY213-N04K	4 sockets + OCP
	BY213-N05K	5 sockets + OCP

Illustration 3.9 - Model Similarity of BY213-S series

Series	model	Description
S series	BY213-S013	1 socket+1 USB
	BY213-S023	2 sockets+1 USB
	BY213-S033	3 sockets+1 USB
	BY213-S013K	1 socket+1 USB+ OCP
	BY213-S023K	2 sockets+1 USB+ OCP
	BY213-S033K	3 sockets+1 USB+ OCP
	BY213-S043K	4 sockets+1 USB+ OCP
	BY213-S02	2 sockets
	BY213-S03	3 sockets
	BY213-S01K	1 socket + OCP
	BY213-S02K	2 sockets + OCP
	BY213-S03K	3 sockets + OCP
	BY213-S04K	4 sockets + OCP
	BY213-S05K	5 sockets + OCP

8.0 Test Summary					
Evaluation Period	30-Aug-2018 to 18-Oct-2018		Project No.	180824101GZU	
Sample Rec. Date	28-Aug-2018	Condition	Prototype	Sample ID.	S180824101-001~012
Test Location	Intertek Testing Services Shenzhen Ltd. Guangzhou Branch Block E, No,7-2 Guang Dong Software Science Park, Caipin Road, Guangzhou Science City, CETDD Guangzhou				
Test Procedure	Testing Lab				
Determination of the result includes consideration of measurement uncertainty from the test equipment and methods. The product was tested as indicated below with results in conformance to the relevant test criteria.					
The following tests were performed:					
Test Description	UL 962A:2016 Ed.4+ R:10Oct2017 Clause		CSA C22.2 No. 308, Issued: 2014/12/01 Clause	UL 746C:2004 Ed.6+R:19May2017 Clause	
Temperature Test	26		5.3.6	--	
Dielectric Voltage-Withstand Test	27		5.3.3	--	
Leakage Current Test	28		5.3.7	--	
Grounding Continuity Test	29		--	--	
Fault Current Test	30		--	--	
Overcurrent Test	31		--	--	
Strain Relief Test	33		--	--	
Push Back Relief Test	34		--	--	
Impact test	35		5.3.2	--	
Crushing Test	36		--	--	
Adequacy of Mounting Test	37		--	--	
Mold Stress-Relief Distortion Test	39		--	--	
Spill Test	40		--	--	
Accessibility Tests	41		--	--	
Flammability – 127 mm (5 inch) Flame Test	--		--	52	

8.1 Signatures			
A representative sample of the product covered by this report has been evaluated and found to comply with the applicable requirements of the standards indicated in Section 1.0.			
Completed by:	Steven Liang	Reviewed by:	Sunny Tang
Title:	Engineer	Title:	Reviewer
Signature:	Signature on file	Signature:	Signature on file

9.0 Correlation Page For Multiple Listings

The following products, which are identical to those identified in this report except for model number and Listee name, are authorized to bear the ETL label under provisions of the Intertek Multiple Listing Program.

BASIC LISTEE	Dongguan baiyou electronic co.,ltd
Address	2 F A building wufeng industrial jintan road shijie town dongguan city guangdong 523295
Country	CHINA
Product	Furniture Power Distribution Units

MULTIPLE LISTEE 1	Atlantic Furniture INC				
Address	5 Industrial Drive West, PO Box 287 South Deerfield MA 01373				
Country	USA				
Brand Name	AFI				
ASSOCIATED MANUFACTURER	Dongguan baiyou electronic co.,ltd				
Address	2 F A building wufeng industrial jintan road shijie town Dongguan city Guangdong 523295				
Country	CHINA				
<table> <tr> <th>MULTIPLE LISTEE 1 MODELS</th><th>BASIC LISTEE MODELS</th></tr> <tr> <td>BY213-C022</td><td>BY213-L021</td></tr> </table>		MULTIPLE LISTEE 1 MODELS	BASIC LISTEE MODELS	BY213-C022	BY213-L021
MULTIPLE LISTEE 1 MODELS	BASIC LISTEE MODELS				
BY213-C022	BY213-L021				

MULTIPLE LISTEE 2	Blue Shark Technology Co., Limited				
Address	Room 502-506, No.33 Keyuan South road, Guancheng District, Dongguan, Guangdong, 523000				
Country	China				
Brand Name	Haylink/blueshark				
ASSOCIATED MANUFACTURER	Dongguan baiyou electronic co.,ltd				
Address	2 F A building wufeng industrial jintan road shijie town Dongguan city Guangdong 523295				
Country	CHINA				
<table> <tr> <th>MULTIPLE LISTEE 2 MODELS</th><th>BASIC LISTEE MODELS</th></tr> <tr> <td>BST213- followed by H, M, Q, N, L, C, J , S or I; followed by 01, 02, 03, 04 or 05; maybe followed by 1, 2 or 3; maybe followd by K.</td><td>BY213- followed by H, M, Q, N, L, C, J , S or I; followed by 01, 02, 03, 04 or 05; maybe followed by 1, 2 or 3; maybe followd by K.</td></tr> </table>		MULTIPLE LISTEE 2 MODELS	BASIC LISTEE MODELS	BST213- followed by H, M, Q, N, L, C, J , S or I; followed by 01, 02, 03, 04 or 05; maybe followed by 1, 2 or 3; maybe followd by K.	BY213- followed by H, M, Q, N, L, C, J , S or I; followed by 01, 02, 03, 04 or 05; maybe followed by 1, 2 or 3; maybe followd by K.
MULTIPLE LISTEE 2 MODELS	BASIC LISTEE MODELS				
BST213- followed by H, M, Q, N, L, C, J , S or I; followed by 01, 02, 03, 04 or 05; maybe followed by 1, 2 or 3; maybe followd by K.	BY213- followed by H, M, Q, N, L, C, J , S or I; followed by 01, 02, 03, 04 or 05; maybe followed by 1, 2 or 3; maybe followd by K.				

MULTIPLE LISTEE 3	eMoMo Technology Co., Ltd				
Address	4th, Floor, Yong He Building, Tai Wan Industrial Park, Shi Yan Town, Bao'an District, Shen Zhen, Guangdong				
Country	China				
Brand Name	eMoMo				
ASSOCIATED MANUFACTURER	Dongguan baiyou electronic co.,ltd				
Address	2 F A building wufeng industrial jintan road shijie town Dongguan city Guangdong 523295				
Country	CHINA				
<table> <tr> <th>MULTIPLE LISTEE 3 MODELS</th><th>BASIC LISTEE MODELS</th></tr> <tr> <td>E- followed by H, M, Q, N, L, C, J , S or I; followed by 01, 02, 03, 04 or 05; maybe followed by 1, 2 or 3; maybe followd by K. HX66P2U2S. HX66P2U3A.</td><td>BY213- followed by H, M, Q, N, L, C, J , S or I; followed by 01, 02, 03, 04 or 05; maybe followed by 1, 2 or 3; maybe followd by K. BY213-C021K. BY213-S023.</td></tr> </table>		MULTIPLE LISTEE 3 MODELS	BASIC LISTEE MODELS	E- followed by H, M, Q, N, L, C, J , S or I; followed by 01, 02, 03, 04 or 05; maybe followed by 1, 2 or 3; maybe followd by K. HX66P2U2S. HX66P2U3A.	BY213- followed by H, M, Q, N, L, C, J , S or I; followed by 01, 02, 03, 04 or 05; maybe followed by 1, 2 or 3; maybe followd by K. BY213-C021K. BY213-S023.
MULTIPLE LISTEE 3 MODELS	BASIC LISTEE MODELS				
E- followed by H, M, Q, N, L, C, J , S or I; followed by 01, 02, 03, 04 or 05; maybe followed by 1, 2 or 3; maybe followd by K. HX66P2U2S. HX66P2U3A.	BY213- followed by H, M, Q, N, L, C, J , S or I; followed by 01, 02, 03, 04 or 05; maybe followed by 1, 2 or 3; maybe followd by K. BY213-C021K. BY213-S023.				

10.0 General Information

The Applicant and Manufacturer have agreed to produce, test and label ETL Listed products in accordance with the requirements of this Report. The Manufacturer has also agreed to notify Intertek and to request authorization prior to using alternate parts, components or materials.

COMPONENTS

Components used shall be those itemized in this Intertek report covering the product, including any amendments

LISTING MARK

The ETL Listing mark is applied to products must be in accordance with those Listing Marks identified on the valid ATM. These shall either be separable in form, such as labels purchased from Intertek, or on a product nameplate or other media only as specifically authorized by Intertek. Use of the mark is subject to the control of Intertek.

The mark must include the following four items:

- 1) applicable country identifiers "US" and/or "C" or "US", "C" and "EU"
- 2) the word "Listed" or "Classified" or "Recognized Component" (whichever is appropriate)
- 3) a control number issue by Intertek
- 4) a product descriptor that identifies the standards used for certification. Example:

For US standards, the words, "Conforms to" shall appear with the standard number along with the word, "Standard" or "Std." Example: "Conforms to ANSI/UL Std. XX."

For Canadian standards, the words "Certified to CAN/CSA Standard CXX No. XX." shall be used, or abbreviated, "Cert. to CAN/CSA Std. CXX No. XX."

Can be used together when both standards are used.

Note: A facsimile must be submitted to Intertek, Attn: Follow-up Services for approval prior to use.

The facsimile need not have a control number. A control number will be issued **after signed Certification Agreements** have been received by the Follow-up Services office, approval of the facsimile of your proposed Listing Mark, satisfactory completion of the Listing Report, and scheduling of a factory

MANUFACTURING AND PRODUCTION TESTS

Manufacturing and Production Tests shall be performed as required in this Report.

FOLLOW-UP SERVICE

Periodic unannounced audits of the manufacturing facility (and any locations authorized to apply the mark) shall be scheduled by Intertek. An audit report shall be issued after each visit. Special attention will be given to the following:

1. Conformance of the manufactured product to the descriptions in this Report.
2. Conformance of the use of the ETL mark with the requirements of this Report and the Certification Agreement.
3. Manufacturing changes.
4. Performance of specified Manufacturing and Production Tests.

In the event that the Intertek representative identifies non-conformance(s) to any provision of this Report, the Applicant shall take one or more of the following actions:

1. Correct the non-conformance.
2. Remove the ETL Mark from non-conforming product.
3. Contact the issuing product safety evaluation center for instructions.

10.1 Evaluation of Unlisted Components

Because Unlisted Components are uncontrolled, and they do not fall under a third party follow up program, Intertek may require these components to be tested and/or evaluated at least once annually, more often for certain components, as part of the independent certification process. The Unlisted Components in Section 5.0 require testing and/or evaluation as indicated.

Note to Intertek Follow Up Inspector: The Component Evaluation Center, CEC, will notify you in writing when these components must be selected and sent to the CEC for re-evaluation

Ship the samples to:
Intertek Testing Services Shenzhen Limited Guangzhou Branch
ETL Component Evaluation Center
Block E, No. 7-2 Guang Dong Software Science Park, Caipin Road, Guangzhou Science
CETDD Guangzhou, China.
Attn: Ms. Joey Kuang
Sample Disposition: Due to the destructive nature of the testing, all samples will be discarded at the conclusion of testing unless, the manufacturer specifically requests the return of the samples. The request for return must accompany the initial component shipment.

11.0 Manufacturing and Production Tests

The manufacturer agrees to conduct the following Manufacturing and Production Tests as specified:

Required Tests

Dielectric Voltage Withstand Test, Grounding Continuity Test

11.1 Dielectric Voltage Withstand Test

Method

The test shall be conducted when the RPT is complete (fully assembled). It is not intended that the RPT be unwired, modified, or disassembled for the test.

The test equipment when adjusted for production-line testing, is to produce an output voltage that is not less than the factory test value specified, nor is the magnitude of the test voltage to be greater than 120 percent of the specified test potential when the tester is used in each of the following conditions:

The test voltage specified below shall be applied between primary circuits and accessible dead-metal parts. The test voltage may be gradually increased to the specified value but must be maintained at the specified value for one second or one minute as required.

a) When the test duration is 1 s, the output voltage is to be maintained within the specified range when:

- 1) Only a voltmeter having an input impedance of at least 2 M Ω and a specimen of the product being tested are connected to the output terminals and
- 2) A relatively high resistance is connected in parallel with the voltmeter and the product being tested, and the value of the resistance is gradually reduced to the point where an indication of unacceptable performance just occurs.

b) When the test duration is 1 min, the output voltage is to be maintained within the specified range (by manual or automatic means) throughout the 1-min duration of the test or until there is an indication of unacceptable performance.

The specified control of the applied voltage, manual or automatic, shall be maintained under conditions of varying line voltage. Higher test potentials are not prohibited from being used when the higher dielectric stress does not adversely affect the insulating systems of the product.

Test Equipment

In addition to the characteristics indicated above, the test equipment is to have the following features and characteristics:

a) A means of indicating the test voltage that is being applied to the appliance under test. This is accomplished by sensing the voltage at the test leads or by an equivalent means.

b) An output voltage that has a sinusoidal waveform, a frequency that is within the range of 40 – 70 Hz, and a peak value of the waveform that is not to be less than 1.3 and not more than 1.5 times the root-mean-square value.

c) A means of effectively indicating unacceptable performance. The indication is to be:

- 1) Auditory, when it can be readily heard above the background noise level;
- 2) Visual, when it commands the attention of the operator; or
- 3) A device that automatically rejects an unacceptable product. When the indication of unacceptable performance is auditory or visual, the indication is to remain active and conspicuous until the test equipment is reset manually.

d) When the test equipment is adjusted to produce the test voltage, and a resistance of 120,000 Ω is connected across the output, the test equipment is to indicate an unacceptable performance within 0.5 s. A resistance of more than 120,000 Ω is not prohibited from being used to produce an indication of unacceptable performance when the manufacturer elects to use a tester having higher sensitivity.

Exception: The sensitivity of the test equipment – and a lower value of resistance – is not prohibited from being used when testing an appliance intended to be permanently wired.

There shall not be any transient voltage applied to the RPT under test that results in the instantaneous voltage applied to the RPT exceeding 120 percent of the peak value of the test voltage that the manufacturer elects to use for this test. This requirement applies for the entire duration of the test, including the time that the voltage is first applied to the RPT and the time that the voltage is removed from the RPT.

Products Requiring Dielectric Voltage Withstand Test:

Product	Test Voltage	Test Time
All products covered by this Report.	1250V AC/	60 s
	1768V DC	
	or	1 s
	1500V AC/ 2121V DC	

11.2 Grounding Continuity Test

Method

Each RPT shall be tested, as a routine production-line test, to determine grounding continuity between the grounding pin or terminal of the attachment plug and the accessible, dead-metal parts of the RPT that become energized. The grounding contact of each receptacle, grounding pin of a supply-cord attachment plug, and other means for grounding on the load side are included in this test.

Compliance with above is determined by any appropriate device, such as an ohmmeter or a battery and buzzer combination, applied between the point of connection of the RPT grounding means and the metal parts in question.

Products Requiring Grounding Continuity Test:

All products covered by this Report.

The following changes are in compliance with the declaration of Section 8.1:

ED 16.3.15 (20-Apr-17) Mandatory