

Prüfbericht-Nr.: Test report no.:	CN226AML 001	Auftrags-Nr.: Order no.:	180237540	Seite 1 von 17 Page 1 of 17
Kunden-Referenz-Nr.: Client reference no.:	N/A	Auftragsdatum: Order date:	2022.06.20	
Auftraggeber: Client:	NINGBO PRINCE TOYS CO.,LTD. No.777 East Taoyuan Road, Guanhaiwei Town, Cixi City, Zhejiang, China.			
Prüfgegenstand: Test item:	BABY RIDE ON CAR			
Bezeichnung / Typ-Nr.: Identification / Type no.:	664			
Auftrags-Inhalt: Order content:	TÜV Rheinland – EMC Service			
Prüfgrundlage: Test specification:	EN IEC 55014-1:2021 EN IEC 55014-2:2021			
Wareneingangsdatum: Date of sample receipt:	2022.06.27			
Prüfmuster-Nr.: Test sample no.:	A003294840-001			
Prüfzeitraum: Testing period:	2022.07.01-2022.07.05			
Ort der Prüfung: Place of testing:	Refer to section 1.1			
Prüflaboratorium: Testing laboratory:	TÜV Rheinland / CCIC (Ningbo) Co., Ltd.			
Prüfergebnis*: Test result*:	Pass			
geprüft von: tested by:	Chao Zhang		genehmigt von: authorized by:	Bingbing Li
Datum: Date:	2022.07.07		Ausstelldatum: Issue date:	2022.07.07
Stellung / Position:	Chao Zhang/PE		Stellung / Position:	Bingbing Li/Reviewer
Sonstiges / Other.				
Zustand des Prüfgegenstandes bei Anlieferung: Condition of the test item at delivery:		Prüfmuster vollständig und unbeschädigt Test item complete and undamaged		
* Legende: 1 = sehr gut 2 = gut 3 = befriedigend 4 = ausreichend 5 = mangelhaft P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet * Legend: 1 = very good 2 = good 3 = satisfactory 4 = sufficient 5 = poor P(ass) = passed a.m. test specification(s) F(ail) = failed a.m. test specification(s) N/A = not applicable N/T = not tested				
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

Prüfbericht - Nr.: CN226AML 001

Test Report No.:

Seite 2 von 17

Page 2 of 17

Test Summary

4.1.1 MAINS TERMINAL CONTINUOUS DISTURBANCE VOLTAGE

Result:

N/A

4.2.1 RADIATED DISTURBANCE IN THE FREQUENCY RANGE FROM 30MHZ TO 1000MHZ

Result:

Pass

5.1.1 ELECTROSTATIC DISCHARGE

Result:

Pass

5.1.2 RADIO FREQUENCY ELECTROMAGNETIC FIELD

Result:

Pass

Contents

1	TEST SITES.....	4
1.1	TEST FACILITIES.....	4
1.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS.....	4
1.3	MEASUREMENT UNCERTAINTY	4
2	GENERAL PRODUCT INFORMATION.....	5
2.1	PRODUCT FUNCTION AND INTENDED USE.....	5
2.2	RATINGS AND SYSTEM DETAILS.....	5
2.3	INDEPENDENT OPERATION MODES	5
2.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS	5
2.5	SUBMITTED DOCUMENTS.....	5
3	TEST SET-UP AND OPERATION MODES.....	6
3.1	PRINCIPLE OF CONFIGURATION SELECTION	6
3.2	PHYSICAL CONFIGURATION FOR TESTING.....	6
3.3	TEST OPERATION AND TEST SOFTWARE	6
3.4	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	6
3.5	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....	6
4	TEST RESULTS EMISSION.....	7
4.1	EMISSION IN THE FREQUENCY RANGE UP TO 30 MHz	7
4.1.1	<i>Mains Terminal Continuous Disturbance Voltage.....</i>	<i>7</i>
4.2	EMISSION IN THE FREQUENCY RANGE ABOVE 30 MHz.....	8
4.2.1	<i>Radiated Disturbance in the Frequency Range from 30MHz to 1000MHz.....</i>	<i>8</i>
5	TEST RESULTS I M M U N I T Y	11
5.1	ENCLOSURE	12
5.1.1	<i>Electrostatic Discharge.....</i>	<i>12</i>
5.1.2	<i>Radio Frequency Electromagnetic Field.....</i>	<i>13</i>
6	PHOTOGRAPHS OF THE TEST SET-UP.....	14
7	LIST OF TABLES.....	17
8	LIST OF FIGURES.....	17
9	LIST OF PHOTOGRAPHS	17

Prüfbericht - Nr.: CN226AML 001
Test Report No.:

Seite 4 von 17
Page 4 of 17

1 Test Sites

1.1 Test Facilities

Laboratory: TÜV Rheinland /CCIC(Ningbo) Co., Ltd.

1st Floor, Building 11, Scholar Innovation Park, No.1188 Zhongguan Road, Zhenhai District, Ningbo 315200 P.R. China.

The used test equipment is in accordance with CISPR 16-1 series standards for measurement of radio interference.

1.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment of Laboratory

No.	Equipment	Model	Serial no.	Cal. due date
1.	EMI test receiver	ESR7	101929	2022.11.08
2.	Bilog Antenna	CBL6112D	49033	2024.03.14
3.	ESD generator	NX30.1	11744	2022.11.11
4.	Stacked Log-Per Antenna	STLP 9128 ES	00219	N/A
5.	Signal generator	SMB100A	180488	2022.11.08
6.	Power Amplifier	BBA150-BC250	102749	2022.11.08

1.3 Measurement Uncertainty

Test Item	Expanded Measurement Uncertainty (k=2)
Conducted Emission (9-150kHz)	3.70dB
Conducted Emission (150k-30MHz)	3.30dB
Disturbance Power	4.27dB
Radiated Emission (30-1000MHz)	4.39dB
Radiated Emission (1-18GHz)	4.67dB
Radiated Emission (CDNE method)	4.05dB

2 General Product Information

2.1 Product Function and Intended Use

The EUT (equipment under test) is an ordinary BABY RIDE ON CAR for household and similar use. For the further information, refer to the user's manual.

2.2 Ratings and System Details

Battery	:	2*AA
Input voltage	:	DC 3V
Protection class	:	Class III

Refer to the User Manual for further information.

2.3 Independent Operation Modes

The basic operation modes are: "ON" or "OFF".

Refer to the User Manual for further information.

2.4 Noise Generating and Noise Suppressing Parts

Refer to the Circuit Diagram for further information.

2.5 Submitted Documents

Circuit diagram and label etc.

3 Test Set-up and Operation Modes

3.1 Principle of Configuration Selection

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test conditions were adapted accordingly in reference to the instructions for use.

Refer to the related paragraph of this report.

Immunity: The equipment under test (EUT) was configured to have its highest possible susceptibility against the tested phenomena. The test conditions were adapted accordingly in reference to the instructions for use.

Refer to the related paragraph of this report.

3.2 Physical Configuration for Testing

Refer to the related paragraph of this report.

3.3 Test Operation and Test Software

Refer to the related paragraph of this report. No software was used.

3.4 Special Accessories and Auxiliary Equipment

None.

3.5 Countermeasures to achieve EMC Compliance

The tested sample contained no noise suppression components as specified in the circuit diagram. No special measure is employed to achieve the requirement.

Prüfbericht - Nr.: CN226AML 001
Test Report No.:

Seite 7 von 17
Page 7 of 17

4 Test Results EMISSION

4.1 Emission in the Frequency Range up to 30 MHz

4.1.1 Mains Terminal Continuous Disturbance Voltage

Result:	N/A
----------------	-----

Because the model is supplied by battery and it cannot be connected to the public low-voltage distribution systems. According to the standard EN IEC 55014-1:2021, there are no limits of terminal disturbance voltage for battery appliance. So the Conducted Emission item is not applicable.

Prüfbericht - Nr.: CN226AML 001
Test Report No.:

Seite 8 von 17
Page 8 of 17

4.2 Emission in the Frequency Range above 30 MHz

4.2.1 Radiated Disturbance in the Frequency Range from 30MHz to 1000MHz

Result:

Pass

Date of testing	:	2022.07.01
Test procedure	:	EN IEC 55014-1:2021 & CISPR 16-2-3
Frequency range	:	30-1000MHz
Kind of test site	:	Semi-anechoic Chamber
Measurement Distance	:	3m
Polarization of Antenna	:	Both horizontal and vertical
Limit	:	EN IEC 55014-1:2021 Table 9
		Quasi-peak limits (3m test distance):
		30-230MHz, 40dB μ V/m;
		230-1000MHz, 47dB μ V/m

Test Setup

Input voltage	:	DC 3V
Operational mode	:	Working
Temperature	:	21°C
Relative humidity	:	57%

Measuring configuration and description

The radiated disturbance was measured in the frequency range from 30MHz to 1000MHz according to EN IEC 55014-1:2021. The measurement was performed in accordance with the method specified in CISPR 16-2-3.


The radiated disturbance test was performed in a 3m semi-anechoic chamber. The test distance is 3m. The normalized site attenuation of the semi-anechoic chamber is regularly calibrated to ensure the radiated disturbance test results are valid. During the test, the EUT was placed on a 0.8m high plastic support above the reference ground plane. The turntable was rotated 360° around and the antenna was varied from 1m to 4m to find the maximum disturbance. The test was performed with the antenna both in its horizontal and vertical polarizations.

The following figures were those measured and recorded by a test receiver. The curves in the figure were those measured with a Peak detector. The symbol “♦” in the figures are those of QP value which were measured in final measurement. Quasi-peak measurements were only performed at those critical frequencies obtained during the test with Peak Detector.

Prüfbericht - Nr.: CN226AML 001
Test Report No.:

Seite 9 von 17
Page 9 of 17

Figure 1: Spectral Diagrams, Radiated disturbance, horizontal

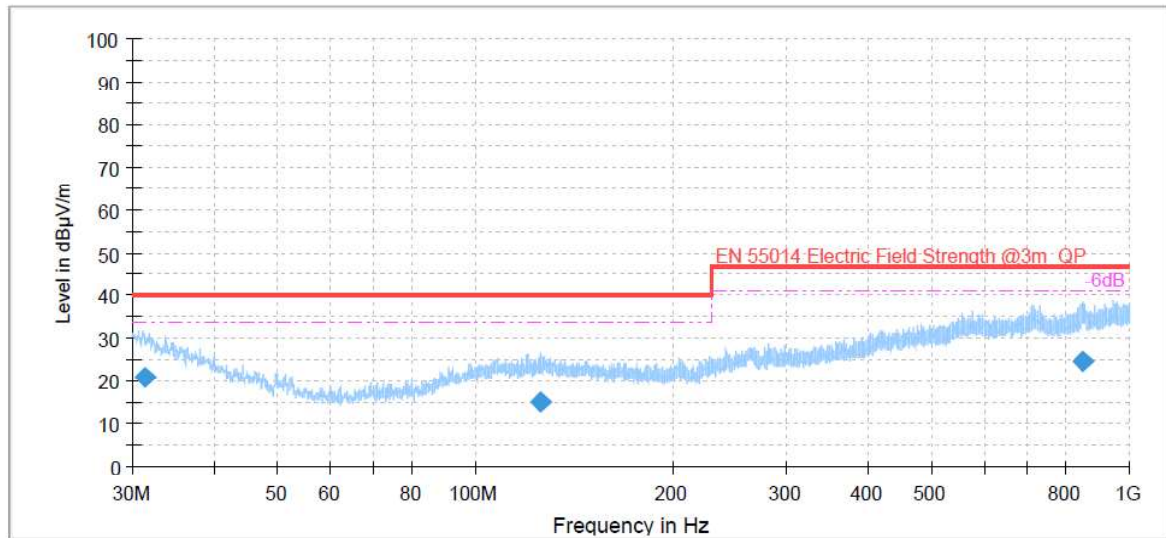


Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
31.271667	21.05	40.00	18.95	1000.0	120.000	114.0	H	218.0	25.1
125.618889	15.20	40.00	24.80	1000.0	120.000	150.0	H	284.0	19.0
845.345000	24.53	47.00	22.47	1000.0	120.000	150.0	H	261.0	29.3

Prüfbericht - Nr.: CN226AML 001
Test Report No.:

Seite 10 von 17
Page 10 of 17

Figure 2: Spectral Diagrams, Radiated disturbance, vertical

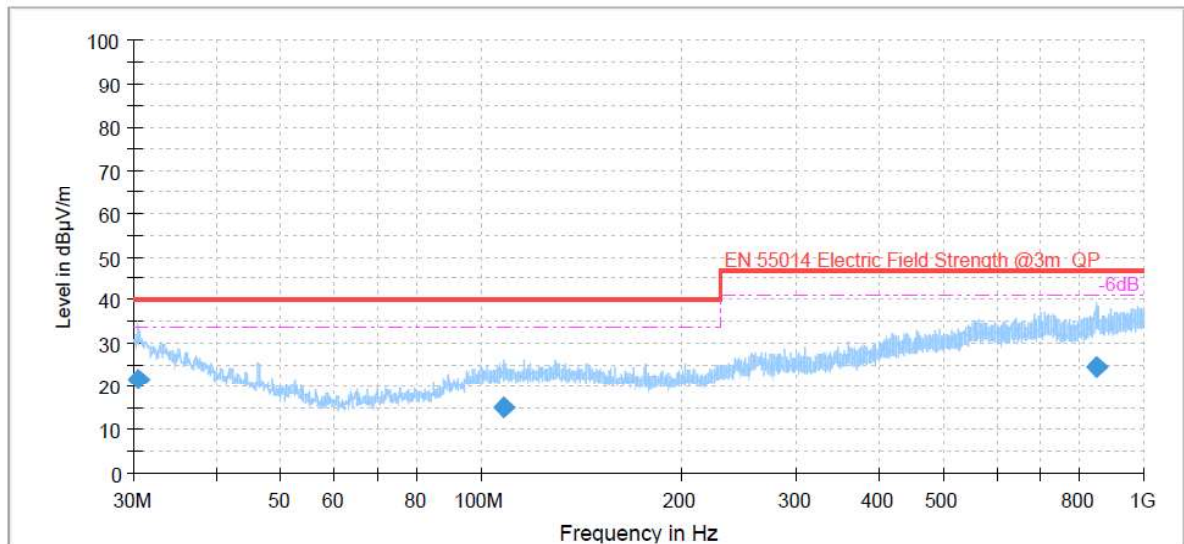

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
30.426667	21.81	40.00	18.19	1000.0	120.000	164.0	V	184.0	25.7
108.590000	14.94	40.00	25.06	1000.0	120.000	197.0	V	102.0	18.8
846.786111	24.53	47.00	22.47	1000.0	120.000	170.0	V	125.0	29.3

5 Test Results I M M U N I T Y

According to the electrical characteristics above and EN IEC 55014-2:2021, the EUT belongs to category or III equipment.

“Category III: battery operated equipment not included in Category I.”

During the immunity tests, the EUT was operated under conditions specified by clause 3.1 of this report.

Performance criterion A: The apparatus shall continue to operate as intended during the test. No degradation of performance or loss of function is allowed below a performance level (or permissible loss of performance) specified by the manufacturer, when the apparatus is used as intended.

Performance criterion B: The apparatus shall continue to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level (or permissible loss of performance) specified by the manufacturer, when the apparatus is used as intended. During the test, degradation of performance is allowed.

Performance criterion C: Temporary loss of function is allowed, provided the function is self-recoverable or can be restored by the operation of the controls, or by any operation specified in the instructions for use.

Date of testing: 2022.07.01-2022.07.05

Room temperature	:	21-23°C
Relative humidity	:	52-58%
Atmospheric pressure	:	102.1 kPa

5.1 Enclosure

5.1.1 Electrostatic Discharge

Result:	Pass
---------	------

The immunity against electrostatic discharge was tested in accordance with EN IEC 55014-2:2021. Test setup and ESD-Generator are according to EN 61000-4-2 which is specified by EN IEC 55014-2:2021.

The EUT is placed on 0,1m wood table above the ground plane. And the minimum distance between the EUT and all other conductive structures except the ground plane beneath the EUT is more than 0,5m.

The reference ground plane is an aluminium sheet of 0.25mm minimum thickness. The reference ground plane is connected to the protective earth. The size of the ground plane is 2m × 2m.

A horizontal coupling plane (HCP), 1.6m × 0.8m, is placed on the table and isolated from the EUT and cables by an insulating support 0.5mm thick. Vertical coupling plane (VCP) of dimensions 0.5m × 0.5m is placed parallel to and positioned at a distance of 0.1m from the EUT.

Charge voltage : ±4.0kV (Contact Discharge), ±8.0kV (Air Discharge)
Polarity : positive / negative
Number of discharges : ≥10
Performance criteria : B

Table 2: ESD, Positive / Negative Polarity

Position	Kind of Discharge	Result	Remarks
Nonmetal Enclosure	Air discharge ±8kV	Pass	No disturbance of function
Button	Air discharge ±8kV	Pass	No disturbance of function
Metal Enclosure	Contact discharge ±4kV	Pass	No disturbance of function
Coupling plane (Both HCP and VCP)	Contact discharge ±4kV	Pass	No disturbance of function

5.1.2 Radio Frequency Electromagnetic Field

Result:

Pass

The immunity against radio-frequency electromagnetic fields in the frequency range between 80MHz and 1000MHz was tested in accordance to EN 61000-4-3 which is specified by clause 5.5 in EN IEC 55014-2:2021.

The test was performed inside a 3m modified semi-anechoic chamber. During the test the part of the ground plane between the field generating antenna and the equipment under test was covered by absorbing material. The distance between the tip of the antenna and the side of the system tested is 3m. The field uniformity of the 1.5mx1.5m plane where the surface of the EUT tested coincides with is regularly calibrated to ensure the 0-6 dB field uniformity criterion as specified by EN 61000-4-3 is met.


Test Level	: 3V/m
Frequency Range	: 80-1000MHz
Modulation	: 80%AM, 1kHz
Frequency Sweep Speed	: ≤0.005 octave/s (1.5×1E-3 decades/s)
Performance Criteria	: A

Table 3: Radiated Susceptibility, Field Strength 3V/m

Position	Observation	Result
Antenna in vertical orientation	No disturbance of function	Pass
Antenna in horizontal orientation	No disturbance of function	Pass

6 Photographs of the Test Set-Up

Photograph 1: Set-up for Radiated Emission

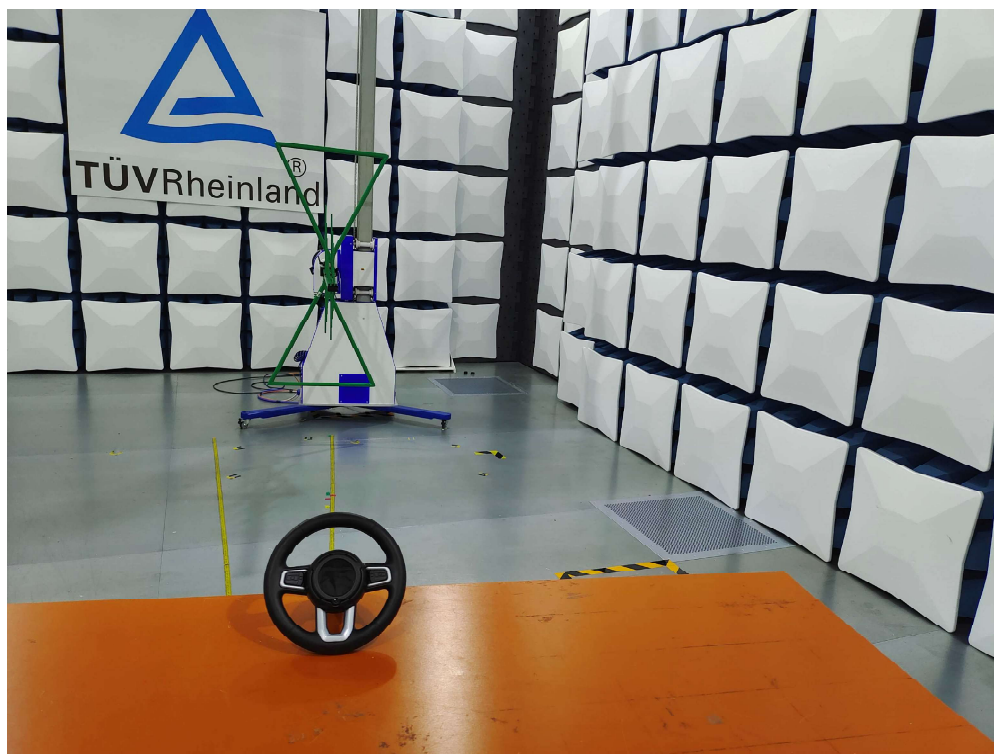

Photograph 2: Set-up for ESD




Prüfbericht - Nr.: CN226AML 001

Test Report No.:

Seite 15 von 17

Page 15 of 17

Photograph 3: Set-up for Radiated Susceptibility

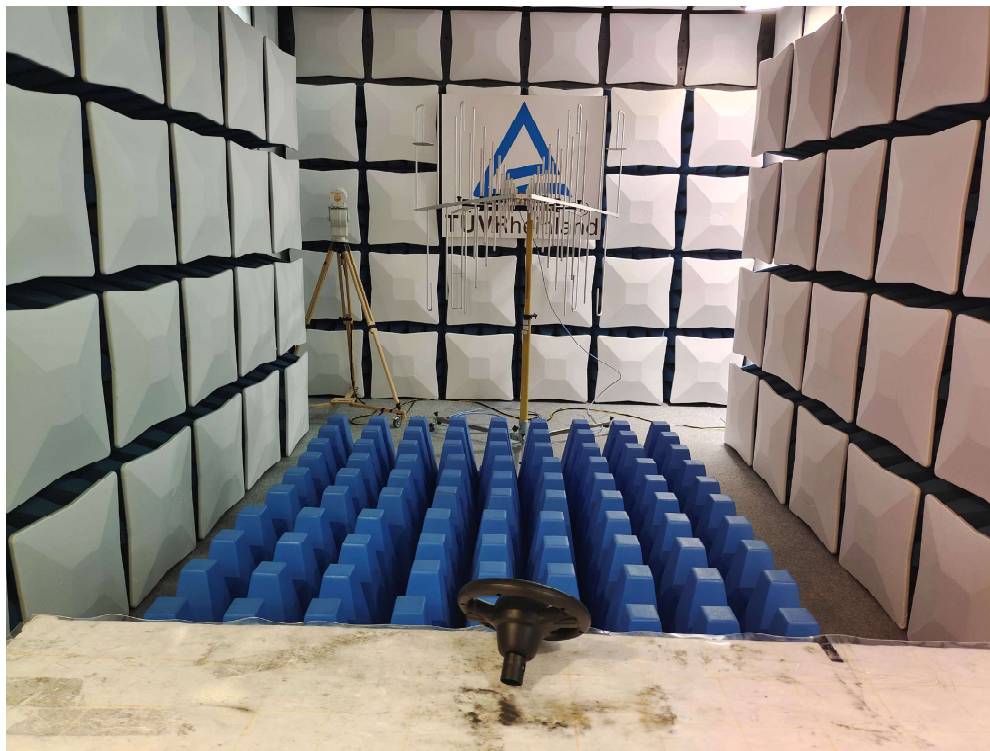

Prüfbericht - Nr.: CN226AML 001
Test Report No.:

Seite 16 von 17
Page 16 of 17

7 Photographs for product



8 List of Tables

Table 1: List of Test and Measurement Equipment of Laboratory	4
Table 2: ESD, Positive / Negative Polarity	12
Table 3: Radiated Susceptibility, Field Strength 3V/m	13

9 List of Figures

Figure 1: Spectral Diagrams, Radiated disturbance, horizontal.....	9
Figure 2: Spectral Diagrams, Radiated disturbance, vertical.....	10

10 List of Photographs

Photograph 1: Set-up for Radiated Emission.....	14
Photograph 2: Set-up for ESD	14
Photograph 3: Set-up for Radiated Susceptibility	15

-- The END --