



Shenzhen CTA Testing Technology Co., Ltd.

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China

TEST REPORT

Report Reference No.....: CTA22062100201

IC.....: 28663-JR1839FCC

Compiled by
(position+printed name+signature)..: File administrators Kevin Liu

Supervised by
(position+printed name+signature)..: Project Engineer Kevin Liu

Approved by
(position+printed name+signature)..: RF Manager Eric Wang

Date of issue.....: July 04, 2022

Testing Laboratory Name.....: Shenzhen CTA Testing Technology Co., Ltd.

Address.....: Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China

Applicant's name.....: NANYANG ZHICHUANGYUAN Technology Co.,LTD

Address.....: Building 1 Intersection of Pangu Avenue and Gongye Road, Tongbai Industrial Cluster, Tongbai County, Nanyang City, Henan Province

Test specification.....:

Standard.....: RSS-Gen Issue 5
RSS-210 Issue 10

Shenzhen CTA Testing Technology Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTA Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTA Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Equipment description.....: Remote Controller

Trade Mark.....: N/A

Manufacturer.....: NANYANG ZHICHUANGYUAN Technology Co.,LTD

Model/Type reference.....: JR1839FCC

Listed Models.....: N/A

Modulation.....: GFSK

Frequency.....: From 2407MHz to 2473MHz

Ratings.....: DC 3V by 2*1.5V AAA Battery

Result.....: PASS

Shenzhen CTA Testing Technology Co., Ltd.

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China

Tel:+86-755 2322 5875 E-mail:cta@cta-test.cn Web:http://www.cta-test.cn

TEST REPORT

Equipment under Test : Remote Controller

Model /Type : JR1839FCC

Listed Models : N/A

Applicant : NANYANG ZHICHUANGYUAN Technology Co.,LTD

Address : Building 1 Intersection of Pangu Avenue and Gongye Road, Tongbai Industrial Cluster, Tongbai County, Nanyang City, Henan Province

Manufacturer : NANYANG ZHICHUANGYUAN Technology Co.,LTD

Address : Building 1 Intersection of Pangu Avenue and Gongye Road, Tongbai Industrial Cluster, Tongbai County, Nanyang City, Henan Province

Test Result:	PASS
---------------------	-------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

1	TEST STANDARDS	4
2	SUMMARY	5
2.1	General Remarks	5
2.2	Product Description	5
2.3	Equipment Under Test	5
2.4	Short description of the Equipment under Test (EUT)	5
2.5	EUT operation mode	6
2.6	Block Diagram of Test Setup	7
2.7	Related Submittal(s) / Grant (s)	7
2.8	Modifications	7
3	TEST ENVIRONMENT	8
3.1	Address of the test laboratory	8
3.2	Test Facility	8
3.3	Environmental conditions	8
3.4	Summary of measurement results	9
3.5	Statement of the measurement uncertainty	9
3.6	Equipments Used during the Test	10
4	TEST CONDITIONS AND RESULTS	11
4.1	AC Power Conducted Emission	11
4.2	Radiated Emissions and Band Edge	12
4.3	Bandwidth of Frequency Band Edge	15
4.4	Channel Bandwidth	22
4.5	Antenna Requirement	25
5	TEST SETUP PHOTOS OF THE EUT	26
6	PHOTOS OF THE EUT	27

1 TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15.249](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz and 24.0-24.25 GHz

[ANSI C63.10-2013](#): American National Standard for Testing Unlicensed Wireless Devices

[KDB558074 D01 V05r02](#): Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.249

[RSS-Gen](#) — General Requirements for Compliance of Radio Apparatus

[RSS-210](#) — Licence-Exempt Radio Apparatus: Category I Equipment

2 SUMMARY

2.1 General Remarks

Date of receipt of test sample	:	Jun. 13, 2022
Testing commenced on	:	Jun. 13, 2022
Testing concluded on	:	Jun. 23, 2022

2.2 Product Description

Product Description:	Remote Controller
Model/Type reference:	JR1839FCC
Listed Models:	N/A
Model Different.:	N/A
Power supply:	DC 3V by 2*1.5V AAA Battery
Serial No.:	N/A
Hardware version:	V1.1
Software version:	V1.0
Adapter information (Auxiliary test supplied by testing Lab):	/
Testing sample ID:	CTA22062100201
2.4G	
Supported type:	2.4G
Modulation:	GFSK
Operation frequency:	2407MHz to 2473MHz
Channel number:	67
Channel separation:	1
Antenna type:	PCB antenna
Antenna gain:	0.00 dBi

2.3 Equipment Under Test

Power supply system utilised

Power supply voltage	:	☐ 230V / 50 Hz ☐ 120V / 60Hz
		☐ 12 V DC ☐ 24 V DC
		☒ Other (specified in blank below) DC 3V by 2*1.5V AAA Battery

2.4 Short description of the Equipment under Test (EUT)

This is a 2.4G Remote Controller.
For more details, refer to the user's manual of the EUT.

2.5 EUT operation mode

The Applicant provides communication tools software(Engineer mode) to control the EUT for staying in continuous transmitting (Duty Cycle more than 98%) and receiving mode for testing .There are 67 channels provided to the EUT and Channel 1/34/67 were selected to test.

Operation Frequency:


Operation Frequency each of channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2407	18	2424	35	2441	52	2458
2	2408	19	2425	36	2442	53	2459
3	2409	20	2426	37	2443	54	2460
4	2410	21	2427	38	2444	55	2461
5	2411	22	2428	39	2445	56	2462
6	2412	23	2429	40	2446	57	2463
7	2413	24	2430	41	2447	58	2464
8	2414	25	2431	42	2448	59	2465
9	2415	26	2432	43	2449	60	2466
10	2416	27	2433	44	2450	61	2467
11	2417	28	2434	45	2451	62	2468
12	2418	29	2435	46	2452	63	2469
13	2419	30	2436	47	2453	64	2470
14	2420	31	2437	48	2454	65	2471
15	2421	32	2438	49	2455	66	2472
16	2422	33	2439	50	2456	67	2473
17	2423	34	2440	51	2457		

Channel	Frequency
The lowest channel	2407 MHz
The middle channel	2440 MHz
The Highest channel	2473 MHz

Additional Instructions

Test Software	RFTestTool
Power level setup	Default

2.6 Block Diagram of Test Setup



2.7 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for the device filing to comply with RSS-Gen Issue 5 RSS-210 Issue 10.

2.8 Modifications

No modifications were implemented to meet testing criteria.

3 TEST ENVIRONMENT

3.1 Address of the test laboratory

Shenzhen CTA Testing Technology Co., Ltd.

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 517856 Designation Number: CN1318

Shenzhen CTA Testing Technology Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

IC- Registration No.:27890 CAB ID: CN0127

The 3m Semi-anechoic chamber of Shenzhen CTA Testing Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with

A2LA-Lab Cert. No.: 6534.01

Shenzhen CTA Testing Technology Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.10 and CISPR 16-1-4:2010.

3.3 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Radiated Emission:

Temperature:	23 ° C
Humidity:	44 %
Atmospheric pressure:	950-1050mbar

AC Main Conducted testing:

Temperature:	24 ° C
Humidity:	47 %
Atmospheric pressure:	950-1050mbar

Conducted testing:

Temperature:	24 ° C
Humidity:	46 %
Atmospheric pressure:	950-1050mbar

Shenzhen CTA Testing Technology Co., Ltd.

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China

Tel:+86-755 2322 5875 E-mail:cta@cta-test.cn Web:http://www.cta-test.cn

3.4 Summary of measurement results

RSS-Gen & RSS-210			
Standard Section	Test Item	Judgment	Remark
RSS-Gen Clause 6.8	Antenna requirement	PASS	
RSS-Gen Clause 8.8	AC Power Line Conducted Emission	N/A	
RSS-210 Section B10	Fundamental & Radiated Spurious Emission Measurement	PASS	
RSS-Gen Clause 6.7	20dB Channel Bandwidth/ 99% Occupied Bandwidth	PASS	
RSS-Gen 8.9 & RSS-Gen 8.10	Band Edge	PASS	

Remark:

1. The measurement uncertainty is not included in the test result.
2. We tested all test mode and recorded worst case in report
3. "N/A" denotes test is not applicable in this Test Report

3.5 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the Shenzhen CTA Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen CTA Testing Technology Co., Ltd. :

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	Below 30MHz	2.45 dB	(1)
Radiated Emission	30~1000MHz	4.06 dB	(1)
Radiated Emission	1~18GHz	5.14 dB	(1)
Radiated Emission	18-40GHz	5.38 dB	(1)
Conducted Disturbance	0.15~30MHz	2.14 dB	(1)
Occupied Bandwidth	2400-2483.5MHz	±0.5%	(1)

- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.


3.6 Equipments Used during the Test

Test Equipment	Manufacturer	Model No.	Equipment No.	Calibration Date	Calibration Due Date
LISN	R&S	ENV216	CTA-308	2021/08/06	2022/08/05
LISN	R&S	ENV216	CTA-314	2021/08/06	2022/08/05
EMI Test Receiver	R&S	ESPI	CTA-307	2021/08/06	2022/08/05
EMI Test Receiver	R&S	ESCI	CTA-306	2021/08/06	2022/08/05
Spectrum Analyzer	Agilent	N9020A	CTA-301	2021/08/06	2022/08/05
Spectrum Analyzer	R&S	FSP	CTA-337	2021/08/06	2022/08/05
Vector Signal generator	Agilent	N5182A	CTA-305	2021/08/06	2022/08/05
Analog Signal Generator	R&S	SML03	CTA-304	2021/08/06	2022/08/05
Universal Radio Communication	CMW500	R&S	CTA-302	2021/08/06	2022/08/05
Temperature and humidity meter	Chigo	ZG-7020	CTA-326	2021/08/06	2022/08/05
Ultra-Broadband Antenna	Schwarzbeck	VULB9163	CTA-310	2021/08/07	2022/08/06
Horn Antenna	Schwarzbeck	BBHA 9120D	CTA-309	2021/08/07	2022/08/06
Loop Antenna	Zhinan	ZN30900C	CTA-311	2021/08/07	2022/08/06
Horn Antenna	Beijing Hangwei Dayang	OBH100400	CTA-336	2021/08/06	2022/08/05
Amplifier	Schwarzbeck	BBV 9745	CTA-312	2021/08/06	2022/08/05
Amplifier	Taiwan chengyi	EMC051845B	CTA-313	2021/08/06	2022/08/05
Directional coupler	NARDA	4226-10	CTA-303	2021/08/06	2022/08/05
High-Pass Filter	XingBo	XBLBQ-GTA18	CTA-402	2021/08/06	2022/08/05
High-Pass Filter	XingBo	XBLBQ-GTA27	CTA-403	2021/08/06	2022/08/05
Automated filter bank	Tonscend	JS0806-F	CTA-404	2021/08/06	2022/08/05
Power Sensor	Agilent	U2021XA	CTA-405	2021/08/06	2022/08/05
Amplifier	Schwarzbeck	BBV9719	CTA-406	2021/08/06	2022/08/05

4 TEST CONDITIONS AND RESULTS

4.1 AC Power Conducted Emission

TEST CONFIGURATION

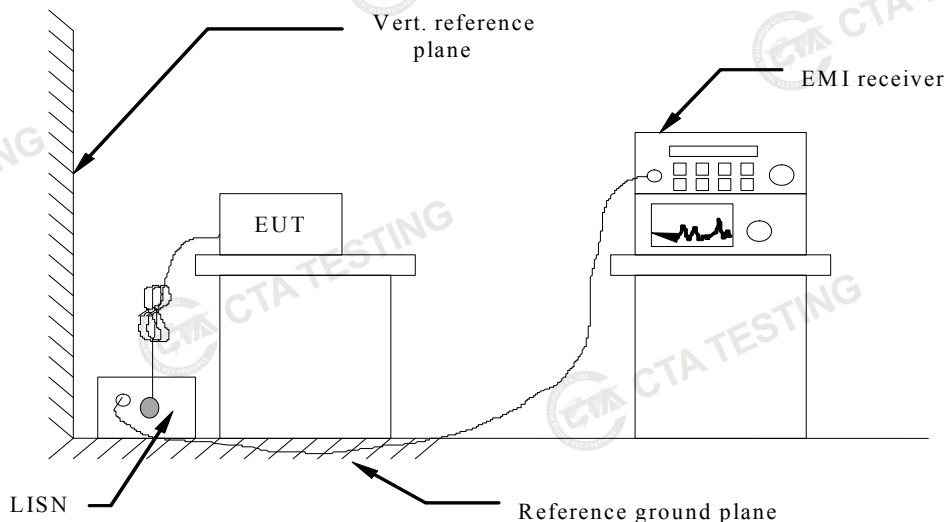

TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2013.
- 2 Support equipment, if needed, was placed as per ANSI C63.10-2013
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2013
- 4 The EUT received power from adapter, the adapter received AC120V/60Hz and AC 240V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following :

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.


TEST RESULTS

The EUT is Powered by the Battery, So this test item is not applicable for the EUT.


4.2 Radiated Emissions and Band Edge

TEST CONFIGURATION


Frequency range 9 KHz – 30MHz

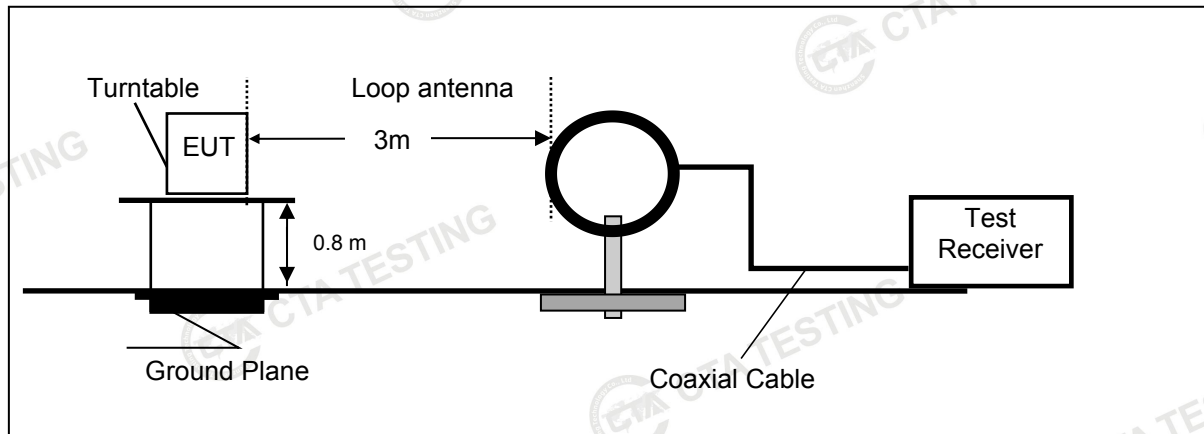

Frequency range 30MHz – 1000MHz

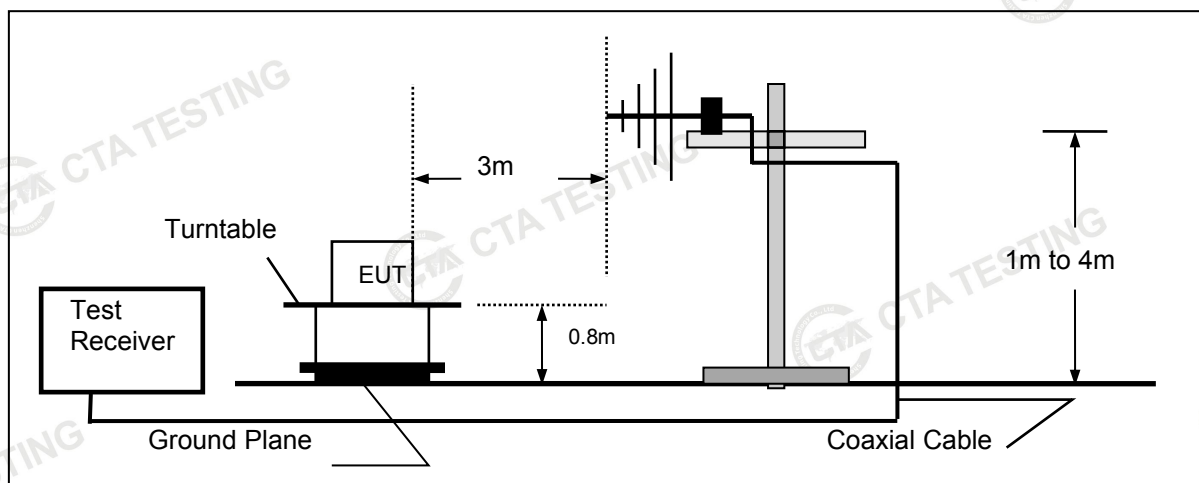

Frequency range above 1GHz-25GHz

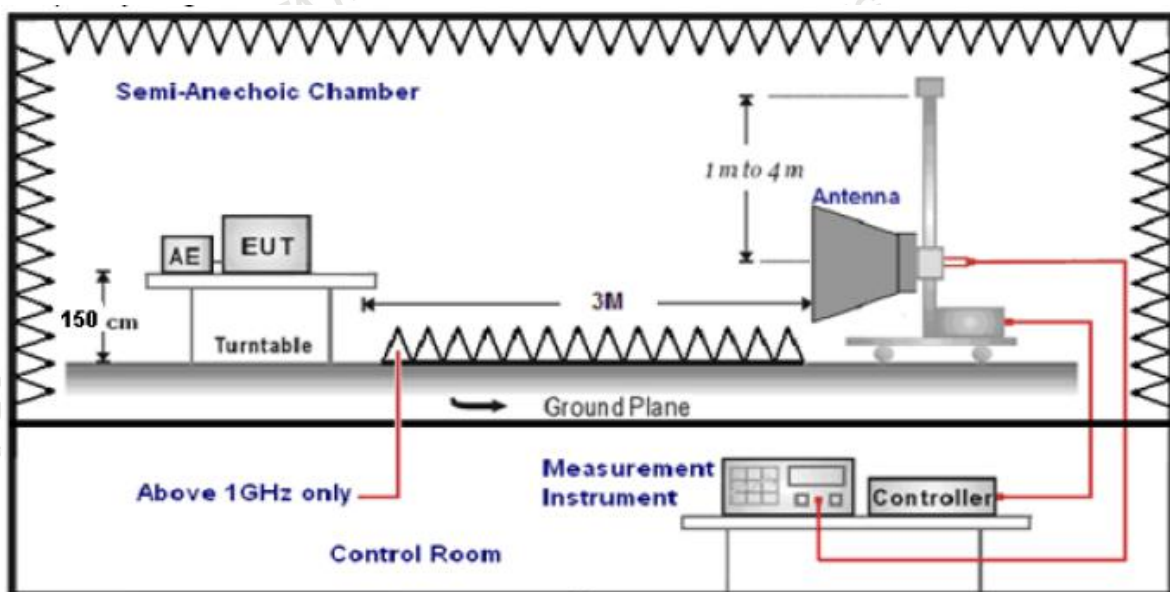

Shenzhen CTA Testing Technology Co., Ltd.

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China
Tel:+86-755 2322 5875 E-mail:cta@cta-test.cn Web:http://www.cta-test.cn

TEST PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane when testing frequency range 9 KHz –1GHz;the EUT was placed on a turn table which is 1.5m above ground plane when testing frequency range 1GHz – 25GHz.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.
5. The EUT minimum operation frequency was 32.768KHz and maximum operation frequency was 2480MHz.so radiated emission test frequency band from 9KHz to 25GHz.
6. The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
9KHz-30MHz	Active Loop Antenna	3
30MHz-1GHz	Ultra-Broadband Antenna	3
1GHz-18GHz	Double Ridged Horn Antenna	3
18GHz-25GHz	Horn Antenna	1

7. Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
9KHz-150KHz	RBW=200Hz/VBW=3KHz,Sweep time=Auto	QP
150KHz-30MHz	RBW=9KHz/VBW=100KHz,Sweep time=Auto	QP
30MHz-1GHz	RBW=120KHz/VBW=1000KHz,Sweep time=Auto	QP
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

$$\text{Transd}=AF +CL-AG$$

RADIATION LIMIT

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission from intentional radiators at a distance of 3 meters shall not exceed the following table. According to § 15.247(d), in any 100kHz bandwidth outside the frequency band in which the EUT is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power.

The pre-test have done for the EUT in three axes and found the worst emission at position shown in test setup photos.

Frequency (MHz)	Distance (Meters)	Radiated (dBμV/m)	Radiated (μV/m)
0.009-0.49	3	$20\log(2400/F(\text{KHz}))+40\log(300/3)$	$2400/F(\text{KHz})$
0.49-1.705	3	$20\log(24000/F(\text{KHz}))+40\log(30/3)$	$24000/F(\text{KHz})$
1.705-30	3	$20\log(30)+40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

Shenzhen CTA Testing Technology Co., Ltd.

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China
Tel:+86-755 2322 5875 E-mail:cta@cta-test.cn Web:http://www.cta-test.cn


Field strength limits at various frequencies


Frequency (MHz)	Field strength (mV/m)	
	Fundamental emissions	Harmonic emissions
2400-2483.5	50	0.5

TEST RESULTS

Remark:

1. This test was performed with EUT in X, Y, Z position and the worse case was found when EUT in X position.
2. 2.4G were tested at Low, Middle, and High channel and recorded worst mode at 2.4G 1Mbps.
3. Radiated emission test from 9 KHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9 KHz to 30MHz and not recorded in this report.

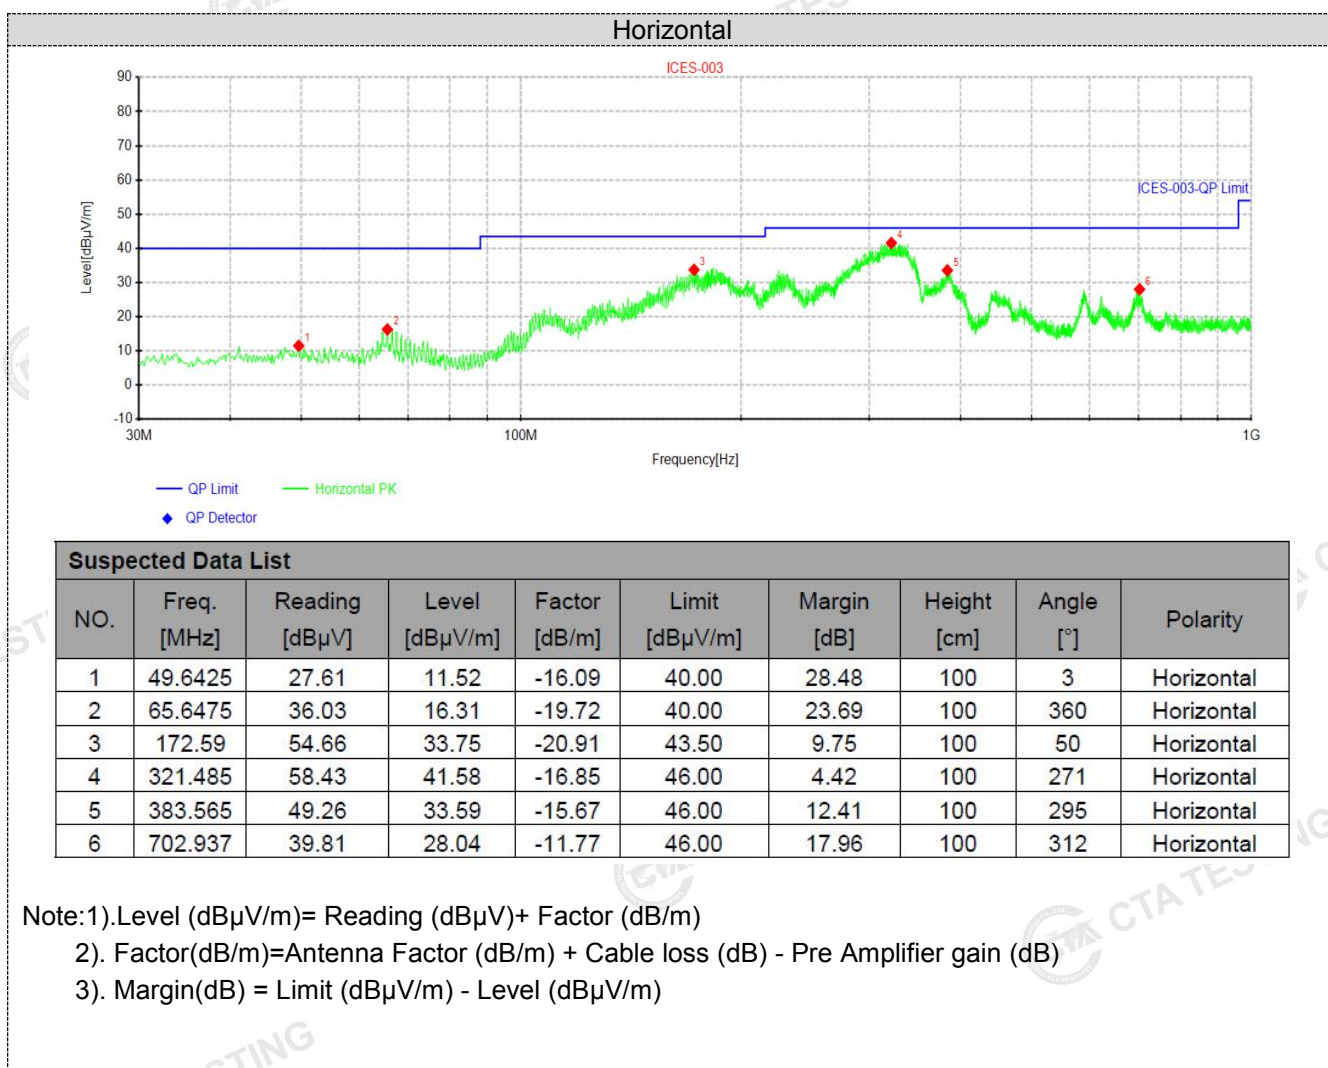For 30MHz-1GHz

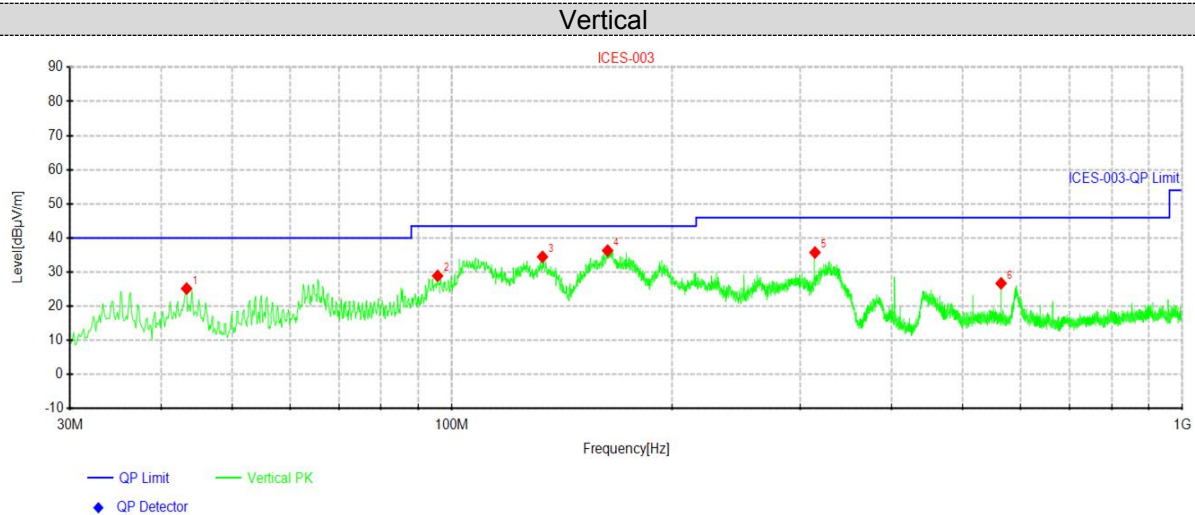**Suspected Data List**

NO.	Freq. [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	43.3375	41.86	25.18	-16.68	40.00	14.82	100	13	Vertical
2	95.5962	47.98	28.93	-19.05	43.50	14.57	100	3	Vertical
3	133.062	55.95	34.49	-21.46	43.50	9.01	100	357	Vertical
4	163.375	57.73	36.31	-21.42	43.50	7.19	100	1	Vertical
5	314.088	52.84	35.76	-17.08	46.00	10.24	100	107	Vertical
6	564.712	39.88	26.72	-13.16	46.00	19.28	100	107	Vertical

Note:1). Level (dBμV/m) = Reading (dBμV) + Factor (dB/m)

2). Factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB)

3). Margin (dB) = Limit (dBμV/m) - Level (dBμV/m)

For 1GHz to 25GHz

Frequency(MHz):			2407		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4814.00	61.22	PK	74	12.78	65.58	32.40	5.11	41.87	-4.36
4814.00	40.93	AV	54	13.07	45.29	32.40	5.11	41.87	-4.36
7221.00	60.13	PK	74	13.87	60.76	36.58	6.43	43.64	-0.63
7221.00	39.72	AV	54	14.28	40.35	36.58	6.43	43.64	-0.63

GFSK (above 1GHz)

Frequency(MHz):			2407		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4814.00	61.16	PK	74	12.84	65.52	32.40	5.11	41.87	-4.36
4814.00	41.17	AV	54	12.83	45.53	32.40	5.11	41.87	-4.36
7221.00	59.53	PK	74	14.47	60.16	36.58	6.43	43.64	-0.63
7221.00	39.62	AV	54	14.38	40.25	36.58	6.43	43.64	-0.63

Frequency(MHz):			2440		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4880.00	60.74	PK	74	13.26	64.69	32.56	5.34	41.85	-3.95
4880.00	41.61	AV	54	12.39	45.56	32.56	5.34	41.85	-3.95
7320.00	59.92	PK	74	14.08	60.28	36.54	6.81	43.71	-0.36
7320.00	39.96	AV	54	14.04	40.32	36.54	6.81	43.71	-0.36

Frequency(MHz):			2440		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4880.00	60.41	PK	74	13.59	64.36	32.56	5.34	41.85	-3.95
4880.00	40.74	AV	54	13.26	44.69	32.56	5.34	41.85	-3.95
7320.00	59.66	PK	74	14.34	60.02	36.54	6.81	43.71	-0.36
7320.00	39.72	AV	54	14.28	40.08	36.54	6.81	43.71	-0.36

Frequency(MHz):			2473		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4946.00	62.07	PK	74	11.93	65.53	32.73	5.64	41.83	-3.46
4946.00	42.10	AV	54	11.90	45.56	32.73	5.64	41.83	-3.46
7419.00	54.57	PK	74	19.43	54.63	36.50	7.23	43.79	-0.06
7419.00	35.63	PK	54	18.37	35.69	36.50	7.23	43.79	-0.06

Frequency(MHz):			2473		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4946.00	60.90	PK	74	13.10	64.36	32.73	5.64	41.83	-3.46
4946.00	42.88	AV	54	11.12	46.34	32.73	5.64	41.83	-3.46
7419.00	59.79	PK	74	14.21	59.85	36.50	7.23	43.79	-0.06
7419.00	41.16	PK	54	12.84	41.22	36.50	7.23	43.79	-0.06

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier
3. Margin value = Limit value - Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.

4.3 BANDWIDTH OF FREQUENCY BAND EDGE

4.3.1 Test Requirement:

Test Requirement:	RSS-Gen 8.9 & RSS-Gen 8.10				
Test Method:	RSS-Gen				
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2310MHz to 2500MHz) data was showed.				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Average	1MHz	3MHz	Average

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in § 15.209, whichever is the lesser attenuation

4.3.2 TEST PROCEDURE

Above 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- Test the EUT in the lowest channel, the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

4.3.3 DEVIATION FROM TEST STANDARD

No deviation

4.3.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

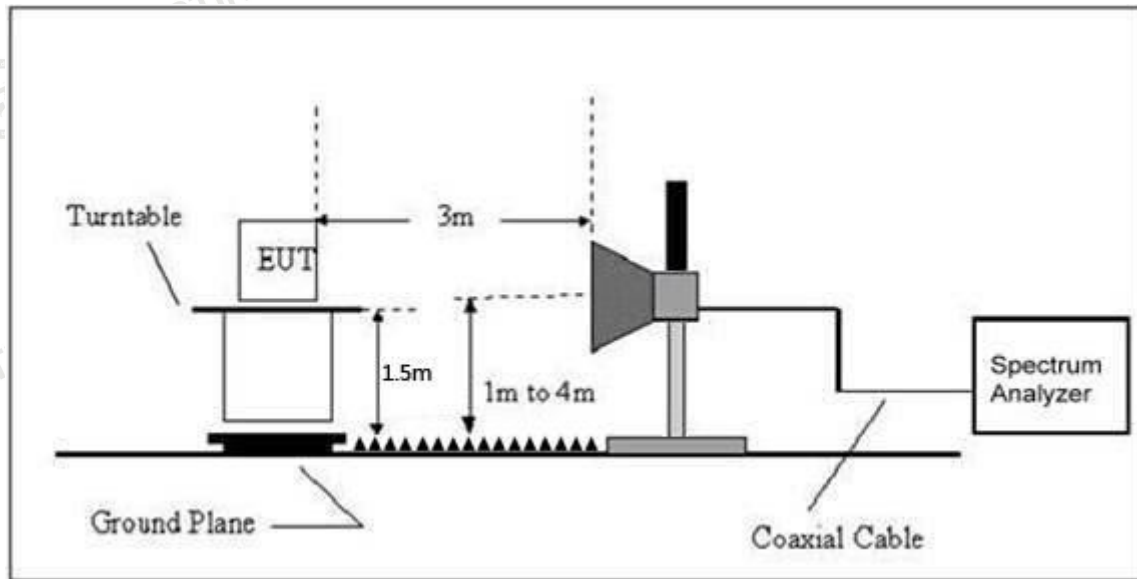

4.3.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

4.3.6 TEST RESULT

2407MHz
Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310	55.61	21.25	3.26	33.14	46.98	74	-27.02	Horizontal
2400	51.26	21.75	3.54	33.42	43.13	74	-30.87	Horizontal
2310	48.96	21.25	3.26	33.14	40.33	74	-33.67	Vertical
2400	46.32	21.75	3.54	33.42	38.19	74	-35.81	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310	44.35	21.25	3.26	33.14	35.72	54	-18.28	Horizontal
2400	40.23	21.75	3.54	33.42	32.1	54	-21.9	Horizontal
2310	36.59	21.25	3.26	33.14	27.96	54	-26.04	Vertical
2400	32.25	21.75	3.54	33.42	24.12	54	-29.88	Vertical

2473MHz
Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.5	55.85	22.12	3.65	33.54	48.08	74	-25.92	Horizontal
2500	52.36	22.35	3.98	33.27	45.42	74	-28.58	Horizontal
2483.5	50.42	22.12	3.65	33.54	42.65	74	-31.35	Vertical
2500	48.56	22.35	3.98	33.27	41.62	74	-32.38	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.5	46.35	22.12	3.65	33.54	38.58	54	-15.42	Horizontal
2500	42.15	22.35	3.98	33.27	35.21	54	-18.79	Horizontal
2483.5	39.24	22.12	3.65	33.54	31.47	54	-22.53	Vertical
2500	35.46	22.35	3.98	33.27	28.52	54	-25.48	Vertical

Remark: Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
All of the restriction bands were tested, and only the data of worst case was exhibited.

Measurement data:

Field Strength of The Fundamental Signal

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2407	104.25	22.55	3.25	33.45	96.60	114	-17.4	Vertical
2407	102.35	22.55	3.25	33.45	94.70	114	-19.3	Horizontal
2440	101.41	23.05	3.36	33.15	94.67	114	-19.33	Vertical
2440	100.23	23.05	3.36	33.15	93.49	114	-20.51	Horizontal
2473	99.56	23.57	3.67	33.68	93.12	114	-20.88	Vertical
2473	98.32	23.57	3.67	33.68	91.88	114	-22.12	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2407	88.69	22.55	3.25	33.45	81.04	94	-12.96	Vertical
2407	87.54	22.55	3.25	33.45	79.89	94	-14.11	Horizontal
2440	86.24	23.05	3.36	33.15	79.5	94	-14.5	Vertical
2440	85.45	23.05	3.36	33.15	78.71	94	-15.29	Horizontal
2473	84.52	23.57	3.67	33.68	78.08	94	-15.92	Vertical
2473	83.15	23.57	3.67	33.68	76.71	94	-17.29	Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

4.4 Channel Bandwidth

Test Requirement:	RSS-Gen Clause 6.7
Test Method:	RSS-Gen

4.4.1 Applied procedures / limit

RSS-Gen Clause 6.7			
Section	Test Item	Frequency Range (MHz)	Result
Clause 6.7	Bandwidth	2400-2483.5	PASS

4.4.2 TEST PROCEDURE

1. Set resolution bandwidth (RBW) = 1-5% or DTS BW, not to exceed 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

4.4.3 DEVIATION FROM STANDARD

No deviation.

4.4.4 TEST SETUP



4.4.5 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

4.4.6 TEST RESULTS

Temperature:	26°C	Relative Humidity:	54%
Test Mode :	GFSK	Test Voltage :	DC 3V

Test channel	Channel Bandwidth (MHz)	Result
Lowest	1.222	Pass
Middle	1.221	
Highest	1.221	

Test channel	99% Occupy Bandwidth (MHz)	Result
Lowest	1.1479	Pass
Middle	1.1477	
Highest	1.1494	

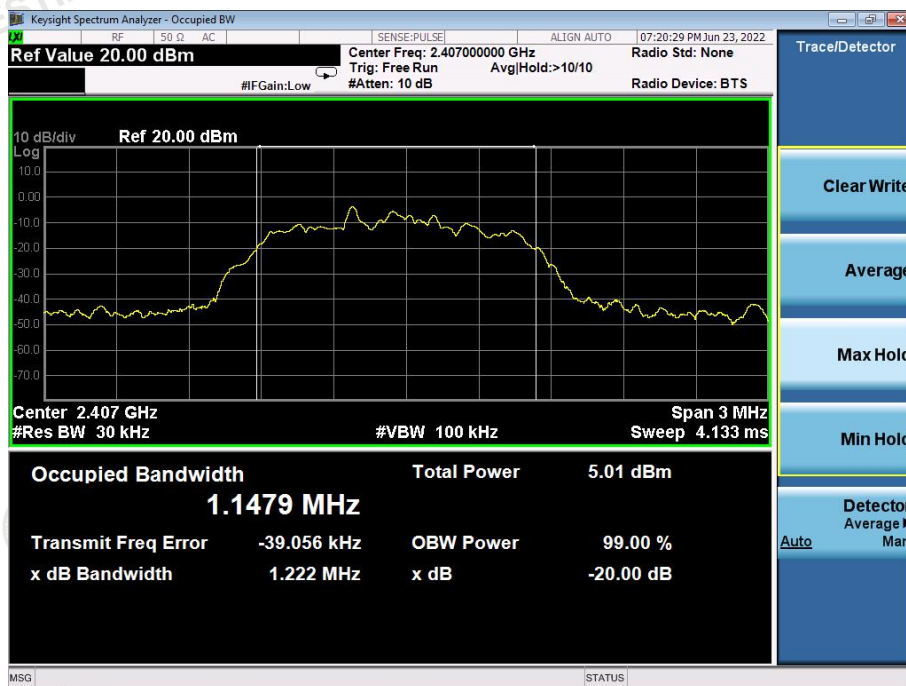

Lowest channel



Middle channel



Highest channel

4.5 Antenna Requirement

Standard Applicable

RSS-Gen 6.8:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited



(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

Antenna Connected Construction

The maximum gain of antenna was 0.00 dBi.

Remark: The antenna gain is provided by the customer, if the data provided by the customer is not accurate, Shenzhen CTA Testing Technology Co., Ltd. does not assume any responsibility.

5 Test Setup Photos of the EUT

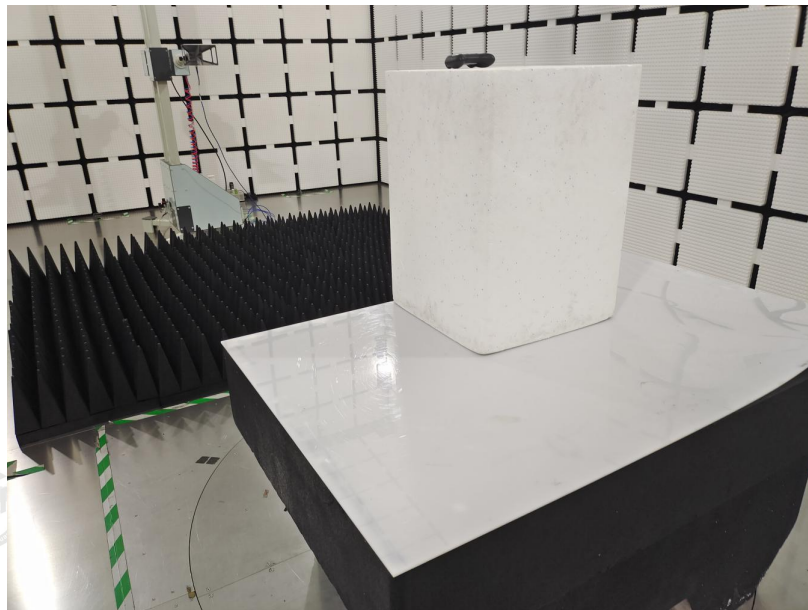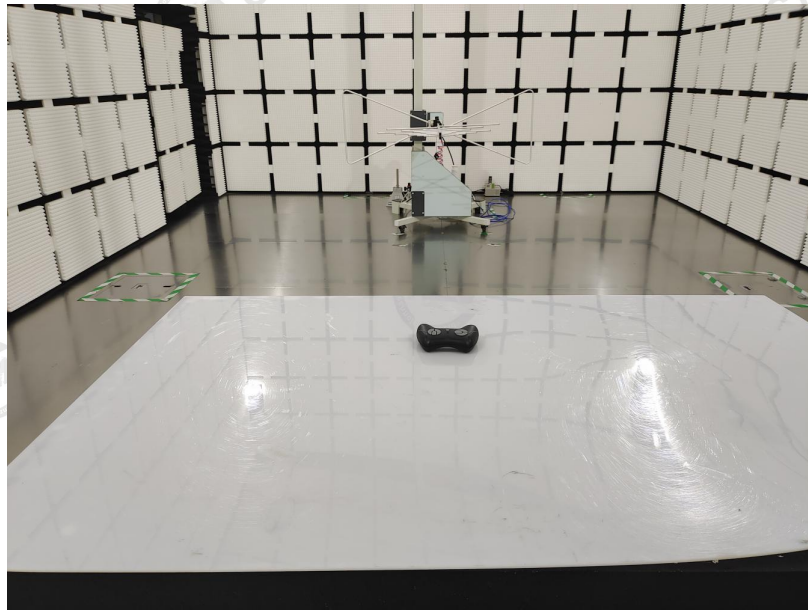

6 Photos of the EUT











PCB ANT

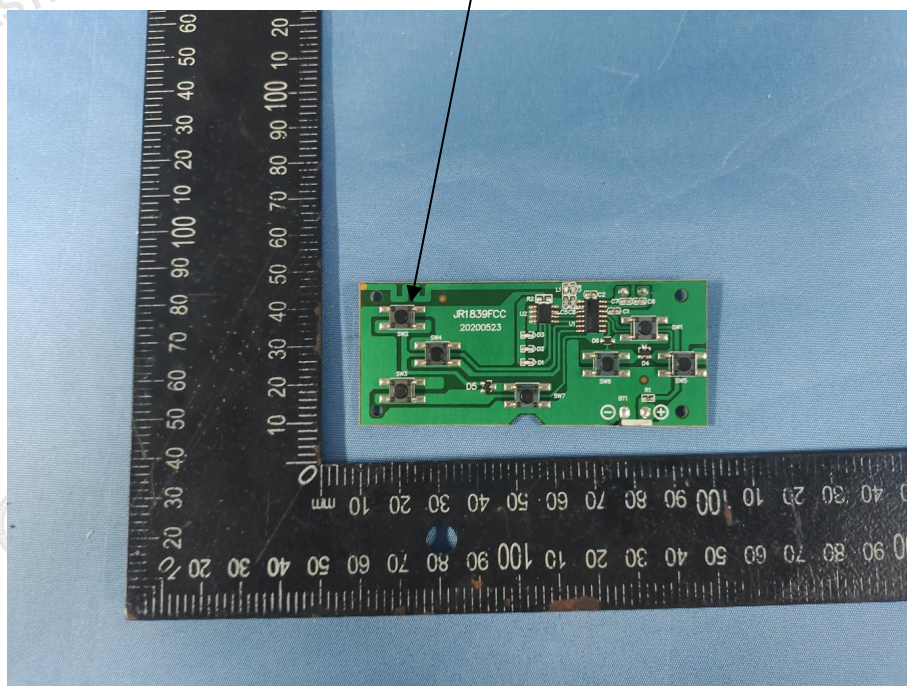

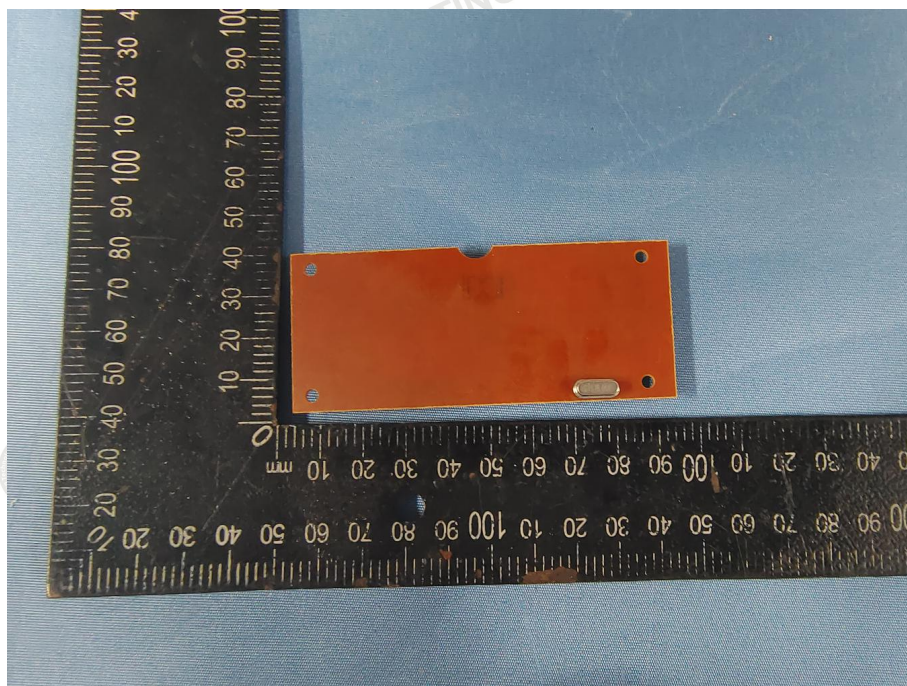

***** End of Report *****